



826 G

SENEBOGEN

MATERIAL- HANDLER

826 G



 127 kW
 92 kW
 392 kWh



Mobile up to 28.6 t
Crawler up to 31.7 t

 13 m



MAXCAB

Stage V

826 G

The recycling powerhouse.

Thanks to its power and versatility, the 826 G sets standards in terms of efficiency and reliability. With a range of 13 meters, it is the optimal solution for recycling and scrap handling. The standard elevating comfort cab not only ensures optimal visibility, but also creates a pleasant workplace in any environment. The 826 G is available in a wide range of versions. In addition to numerous undercarriage variants, the powerhouse also guarantees impressive load capacities. Whether loading or sorting – see for yourself how sensitive and quick this machine is.

Steel construction in in-house production

Our in-house steel construction enables us to create particularly high-quality welded joints that ensure stability and durability.

SENcon

The modern SENcon control system offers comprehensive convenience for operators, fleet managers and service personnel.

Energy efficiency

Appreciated around the world, thanks to resource and environmentally friendly drives and effective multi-circuit hydraulics.

Maximum comfort

The spacious cabs are designed with the needs of the operator in mind - comfortable and spacious with sophisticated features.

A long-term investment

The G series is characterized by robust components and intelligent machine design - the machine retains its value over the long-term, even with demanding continuous use.

Maintenance & Service

Intelligent fleet management and machine status monitoring via telemetry using the SENtrack portal as well as unique accessibility to machine components.

Modular variety

Unique machine variety - we build the perfect machine to meet the needs of your application.

AN INVESTMENT THAT PAYS OFF.

The durability and reliability of the SENNEBOGEN Green Line is based on decades of experience in the construction of high-quality crane and material handling technology. If you want to handle recycled materials in a particularly environmentally friendly and economical way, we have the perfect solution for you.

LATEST GENERATION
MATERIAL HANDLING
TECHNOLOGY
The **G** series.



State-of-the-art engines, drive and exhaust gas aftertreatment systems



Manageable and service-friendly technology for maximum machine availability



Consistent performance thanks to robust steel construction, and high-quality drive and control components from renowned manufacturers



Maximum efficiency thanks to powerful pumps, large-scale hydraulic valves and pipes



Sophisticated technology thanks to the consistent further development up to the 6th The G series generation – for demanding material handling



Durable and robust in extreme weather and harsh operating conditions, works equally well in the cold of the Arctic Circle or in extreme heat

Advanced. The **G** series.



LONG SERVICE LIFE, HIGH VALUE RETENTION

- Reliable and powerful thanks to its robust construction and high-quality components
- Temperature-controlled cooling system, designed and tested for heavy-duty applications and high ambient temperatures

SOPHISTICATED, STATE-OF-THE-ART TECHNOLOGY

- Consistent design for demanding material handling
- Increased efficiency thanks to multi-circuit hydraulics, optimized hose and pipe routing

ENVIRONMENTALLY FRIENDLY DRIVE TECHNOLOGY

- State-of-the-art engine, drive and emission systems in line with the latest technology (stage V)
- Refueling with alternative fuel HVO possible

SIMPLE TO MAINTAIN AND SERVICE

- Fewer service operations on site thanks to SENcon remote diagnostics
- Ideal accessibility to all clearly labeled components for easy maintenance

SAFETY FIRST.

Enjoy a safe work environment thanks to numerous safety features developed especially for recycling and scrap yard use. Protecting people, the environment and the machine.

Extended warranty

from 10.000 operating hours or three years on steel components

Safe & ergonomic

optimal cab and machine component accessibility via steps and railings on the uppercarriage



Best all-round visibility with maximum safety

Panoramic view thanks to continuous glass surfaces, bulletproof glass panel at the front, viewing height of 5.80 m

Pipe fracture safety in series production

Load holding valve for optimum work safety

SENtrack

Maintain fleet management safety by monitoring the condition of your machines

Powerful LED spotlights

for optimum illumination of the work area

Ergonomic working

Daily service and refuelling from the ground

Optimal camera monitoring

of all safety-relevant areas*

50%

saving in operating costs by
significantly reducing energy
consumption

ELECTRO

SENNEBOGEN – WORLD LEADER IN ELECTRIC MATERIAL HANDLERS.

For over **35 years**, we have implemented by far the most
electrical applications


- ✓ A complete solution direct from the manufacturer –
detailed route analyses and individual power supply project
planning, tailored specifically to your application
- ✓ A variety of solutions for power supplies, voltage types and
emergency operating units ex works
- ✓ Electric motor with 400 V / 50 Hz
- ✓ No fueling stops or need to store fuel - always ready for use
- ✓ Service intervals twice as long and lower service costs: No
need for fuel/oil filter and oil changes compared to diesel engine
- ✓ High value retention and significantly longer service life
- ✓ No exhaust gases – good for the environment, good for people
- ✓ Low-noise and vibration-free operation
for greater working comfort
- ✓ Cleaner engine compartment even after long operating period

> ELECTRO**> BATTERY**

BATTERY POWER OF THE NEW GENERATION.



- Over 60 tonnes of CO₂ savings per year during operation
- Active peak shaving: the motor always starts via the battery; even when the charging cable is connected; this allows peak loads to be smoothed out and electricity costs to be saved
- Modular battery capacity: Machine equipped with 1 to 4 battery packs for a maximum of 392 kWh
- Consistent basic appearance regardless of the motor type – battery, electric, or diesel – thanks to new machine design
- Selectable charging power: 44 kW with 2 onboard chargers, 66 kW with 3 onboard chargers or 88 kW with 4 onboard chargers (125 A plug)
- Dual power management: Flexible battery charging even while working thanks to power connection on the undercarriage

Zero emission, flexible
configuration

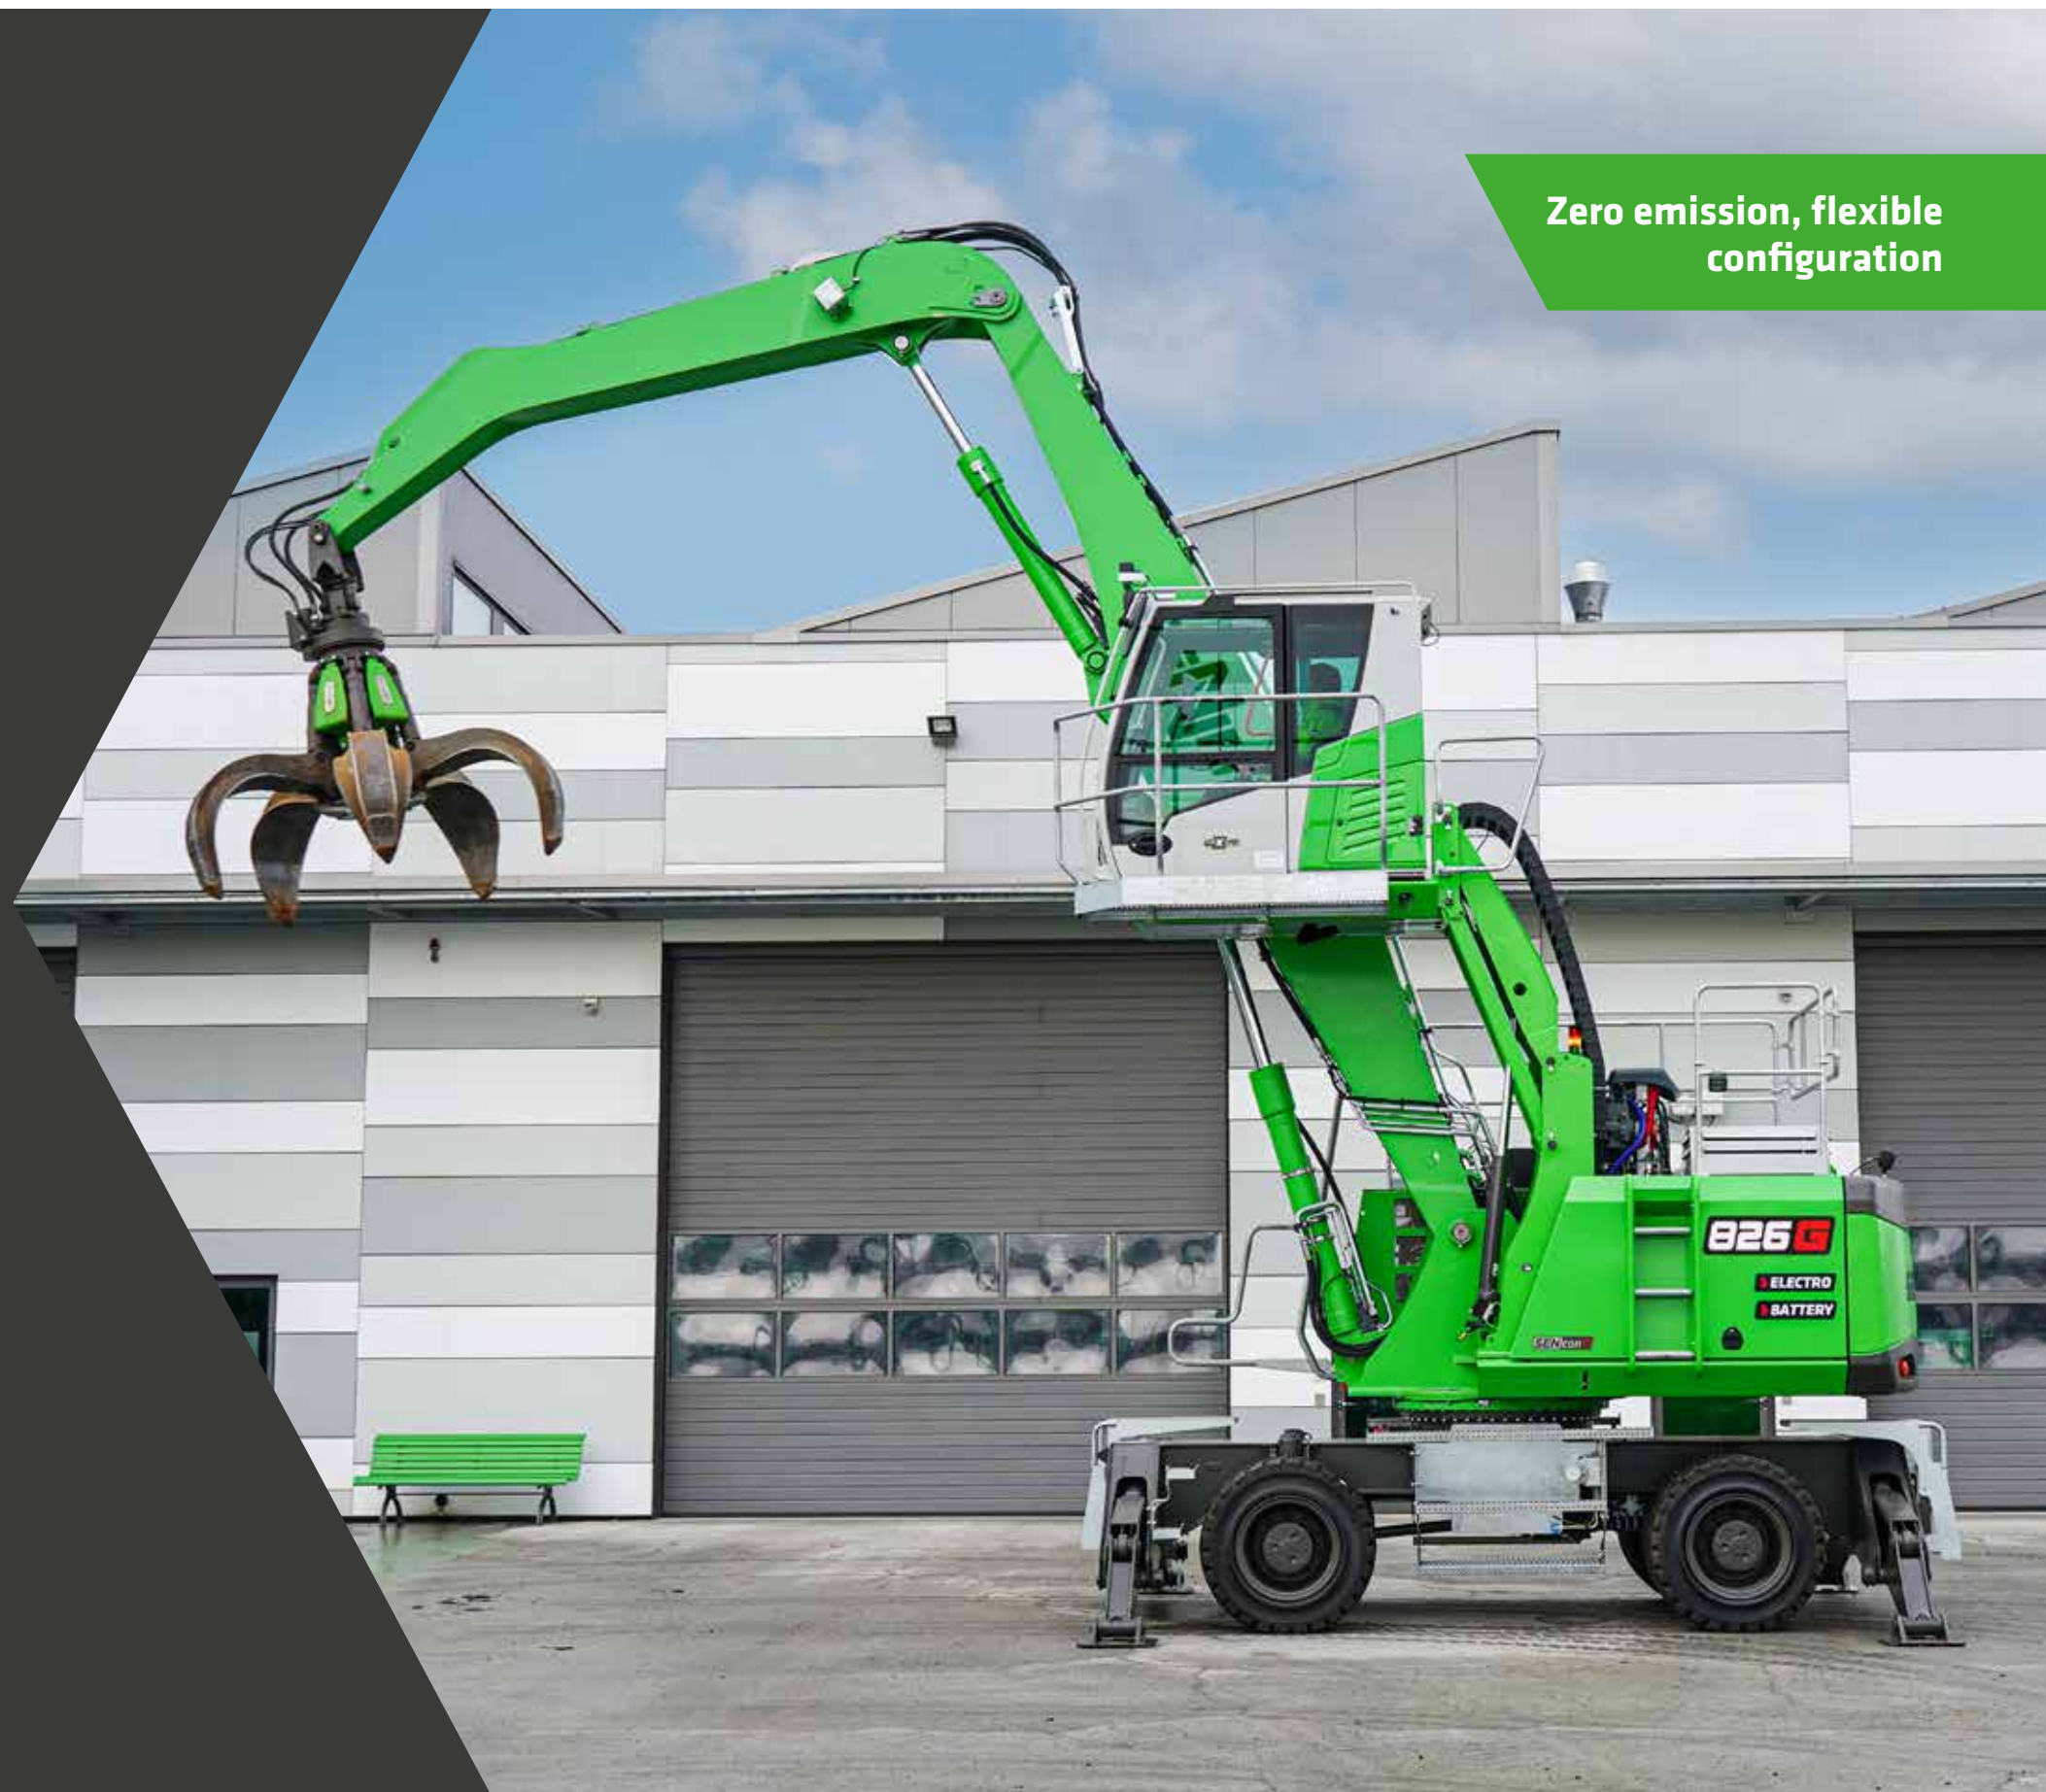

A MODULAR DESIGN. MANY AREAS OF APPLICATION.


EQUIPMENT

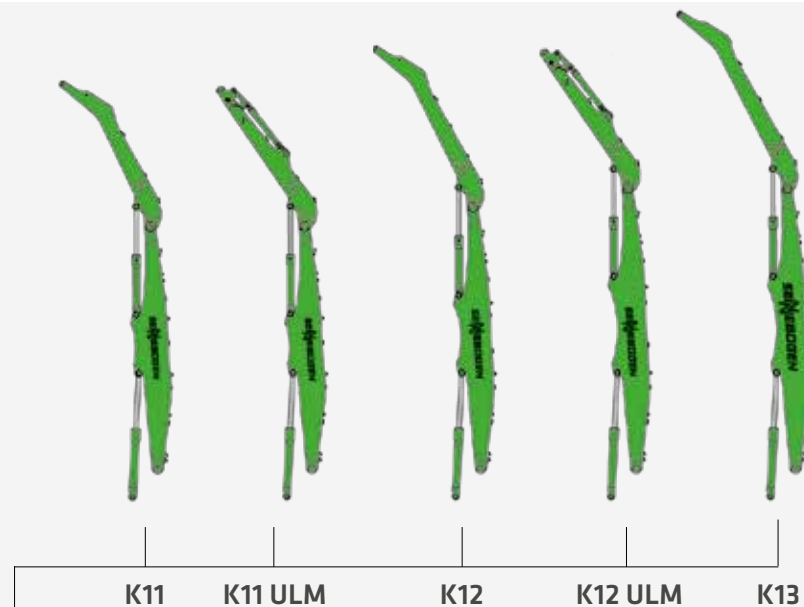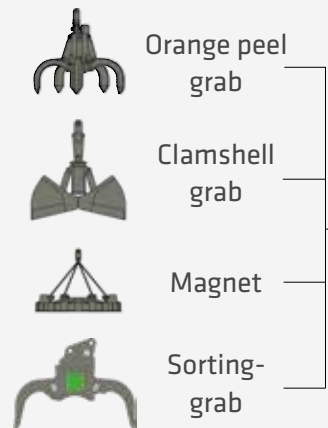


K = Compact boom
ULM = Equipment with tipping kinematics, e.g. for sorting grabs

CAB

CAB ELEVATION

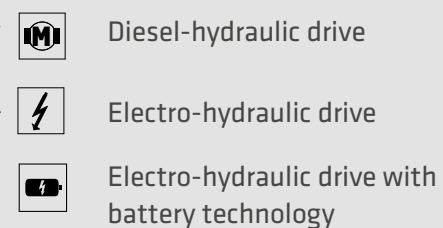


OPTIONS

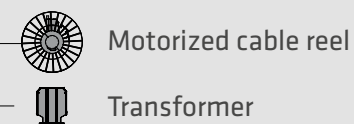


UPPERCARRIAGE

UNDERCARRIAGE

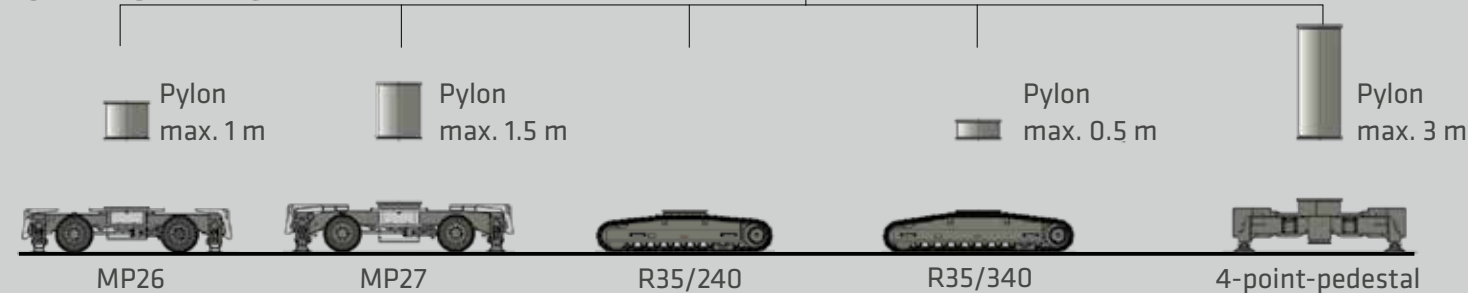

WHAT DOES YOUR MACHINE LOOK LIKE?

Configure your individual machine from our modular system. The great variety of solutions that we can implement in this way is unique anywhere in the world.

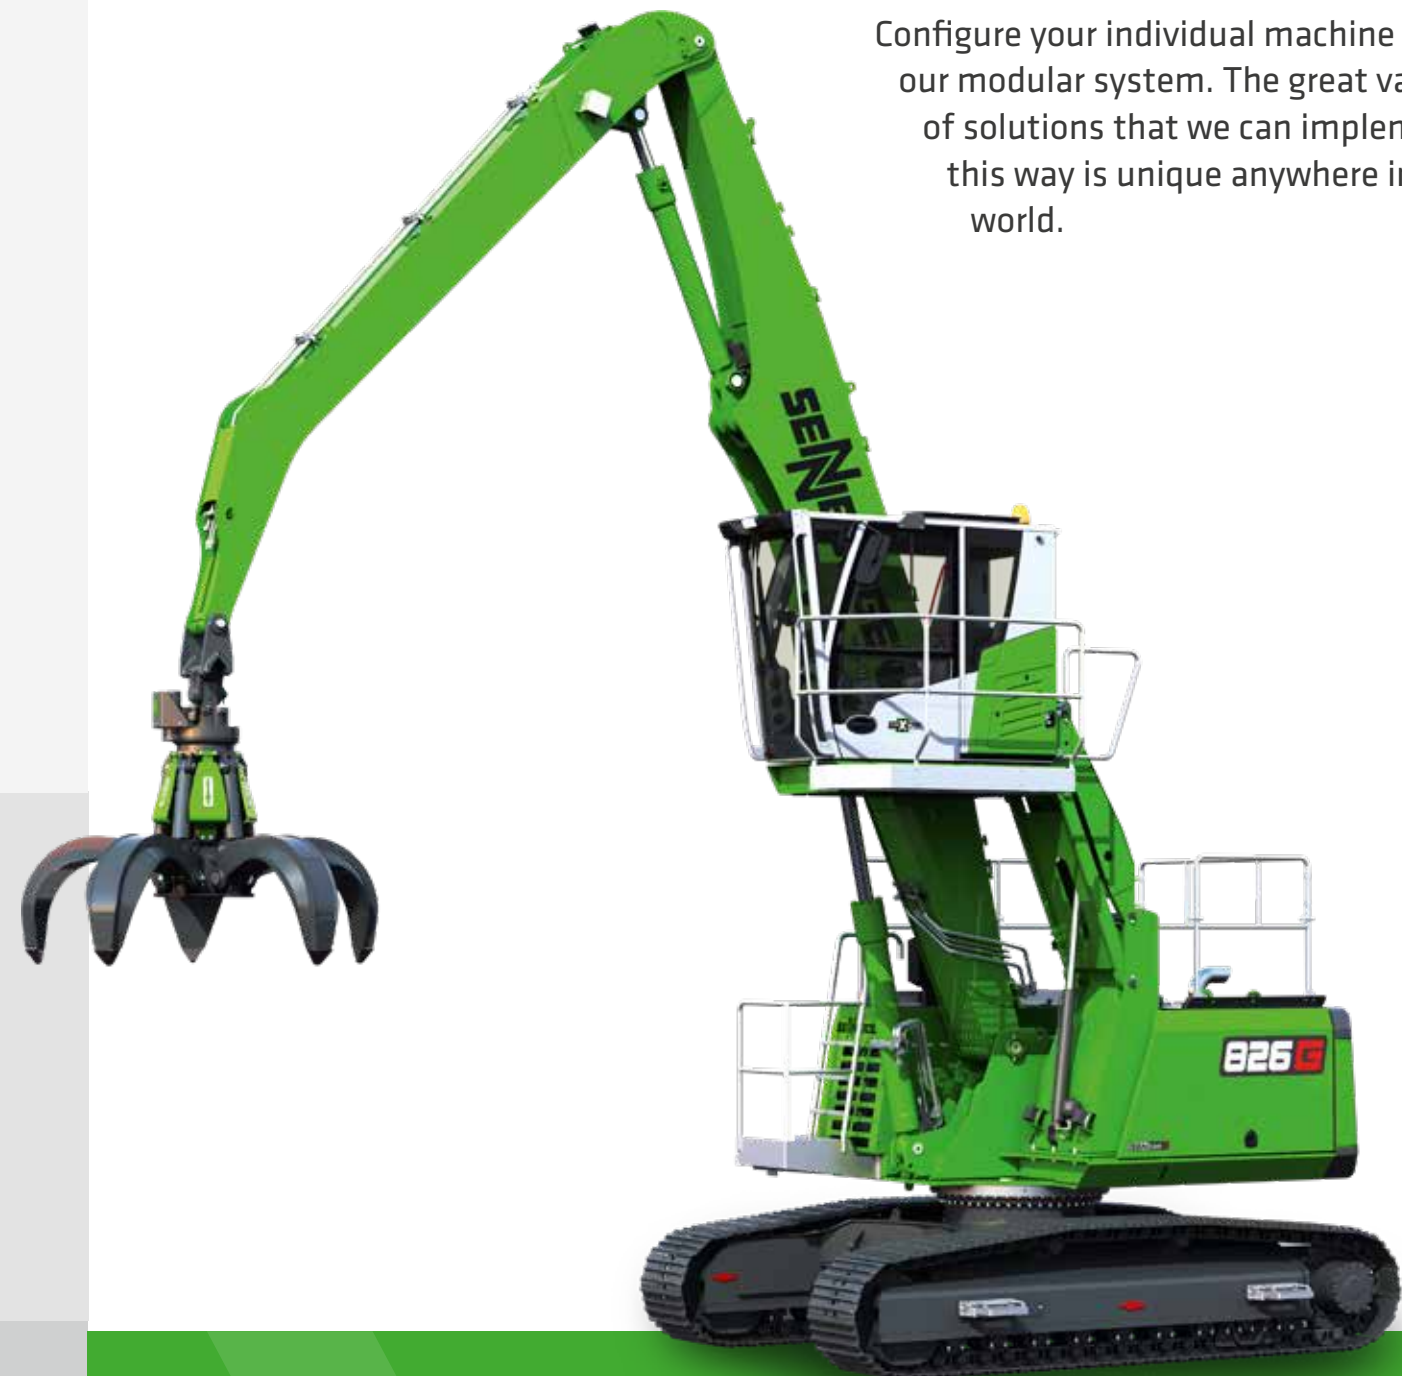

CUSTOM CONFIGURATION

More than 16.000 unique material handling solutions can be delivered through SENNEBOGEN's modular machine design – watch the video now!

www.sennebogen.com/versatility

MAXIMUM COMFORT.

Everything in view

The new Maxcab sets standards in terms of overview and functionality. Thanks to the generous panoramic view, you always have a perfect overview of your work area. Supported by modern safety cameras and an advanced monitor system, you can keep a comfortable and safe eye on the danger zone.

Intuitive operation

The heart of the new Maxcab is the 10-inch touch display, which gives you quick access to all important functions. In addition, buttons and switches for the most important settings ensure intuitive and efficient operation. The battery is automatically disconnected from electrical consumers when the machine is switched off.

Pleasant indoor climate

The Maxcab's modern automatic climate control ensures an optimally tempered working environment in any kind of weather. No matter if it's scorching heat or freezing temperatures - approach your tasks every day with composure and focus.

Individual operator profiles

The Maxcab enables personalized settings for every operator, such as freely configurable joystick assignments. Simply get in, load the saved profile - and get going straight away.

New, modern interior

The Maxcab impresses with a completely revised interior design that meets the highest standards of ergonomics and comfort. High-quality materials and a well thought-out interior design create a pleasant working environment, while the continuous large windows ensure a generous feeling of space.

Easy control

The intelligent SENcon control system gives you quick and easy feedback on the machine's condition. Thanks to the intuitive user interface, it has never been easier to monitor energy consumption and utilization, control the desired working modes and contribute towards reducing operating costs.

THE NEW
G SERIES
MAXCAB

MAXCAB

SENcon The machine control of the future.

The modern SENcon control system offers comprehensive comfort for operators, fleet managers and service personnel.

Assistance systems increase work safety, make work processes more efficient and remote diagnostics quick and easy. Through the analysis of machine data, you can optimize the operation and reduce the CO₂ footprint of the machine.



1. Driver comfort of tomorrow thanks to modern assistance systems

- Quickly setup & access to comprehensive driver profiles
- Integrated safety systems (e.g. work area limitation)
- Safe machine movements thanks to semi-autonomous movements
- Preparation for remote control and fully automated operation movements



2. Effective remote service reduces costs and saves time


- Extract and analyze machine data from any location
- State-of-the-art diagnostic tool for effective remote diagnostics
- Guarantee of the best possible machine availability and operating safety

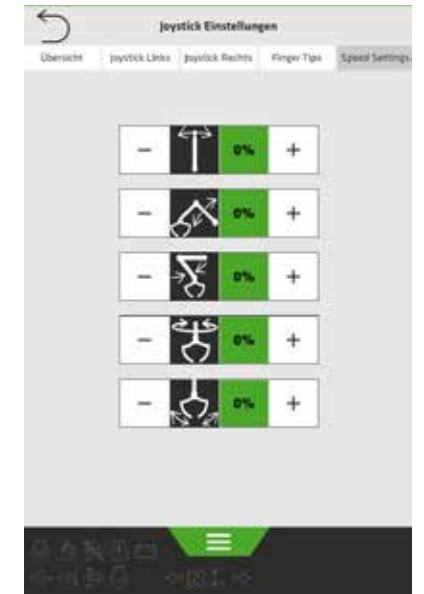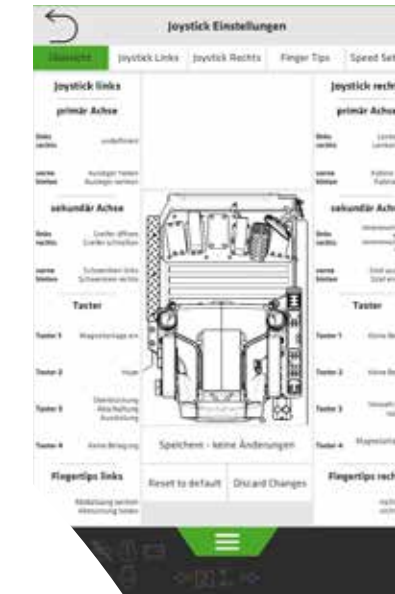

Quick access to all important functions via the large 10-inch touch display

3. Always up to date: Software updates over-the-air (SOTA)

- Efficient installation of new functions of the machine control system remotely without physical intervention in the machine
- Continuous work with the latest technology
- The machine remains maximally available and flexible in use

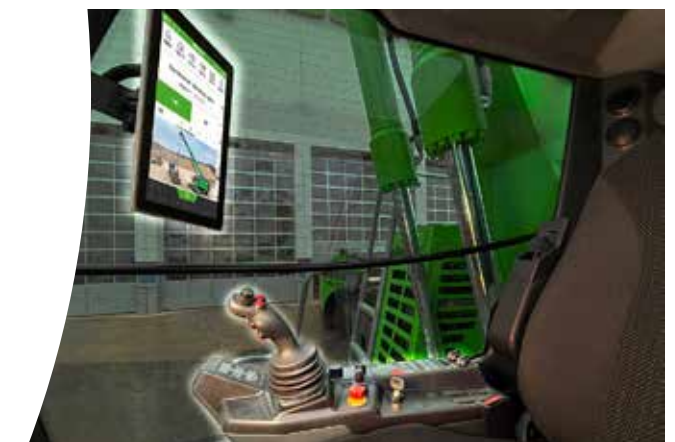

4. Intelligent analysis of machine data

- In combination with the telematic system SENtrack the machine data from SENcon becomes valuable information about work processes and the condition of the machine
- Functions such as the excavator scales ensure view of the current achieved handling performance
- Optimization of machines in use: simple and effective

CAB
HIGHLIGHTS



SERIES		Maxcab	Maxcab Industry
ENTRY		Sliding door incl. sliding pane	Sliding door incl. sliding pane
WINDSCREEN		optimal field of vision	Undivided windscreen in bullet proof glass, design, fixed glazing
RIGHT SIDE WINDOW		laminated safety glass	laminated safety glass
ROOF WINDOW		Roof panel made of safety glass	Roof panel made of bullet proof glass
		-	Windscreen wiper for roof window
WINDSCREEN WIPER		s windscreen washer system for front windscreen	s windscreen washer system for front windscreen
AIR CONDITIONING		Automatic climate control with fresh air e and recirculation filter	Automatic climate control with fresh air e and recirculation filter
SPOTLIGHT		Powerful LEDs, integrated into the roof	Powerful LEDs, integrated into the roof
SENCON CONTROL, , AND DIAGNOSTICS SYSTEM		✓	✓
OPTIONS			
ROOF WINDOW		Windscreen wiper for roof window	-
PLATFORM		Platform with handrail for safe access to	Platform with handrail for safe access to
RADIO		DAB, with Bluetooth®-function, hands-free kit	DAB, with Bluetooth®-function, hands-free kit
AIR-CONDITIONED SEAT		✓	✓
PROTECTIVE VENTILATION SYSTEM		✓	✓
COOL BOX BEHIND THE DRIVER'S SEAT		✓	✓
PROTECTIVE GRILLE ON ROOF, AND WINDSCREEN		✓	✓
SUN PROTECTION PACKAGE		✓	✓

ALWAYS THE RIGHT
VIEWING ANGLE

With the new **cab elevation**, the operator not only receives a great increase in viewing height for maximum safety and overview: Thanks to the extremely **robust design**, it also guarantees quiet and fatigue-free operation even during fast movements.



Viewing height (G280)
5.8 m

G SERIES
STANDARD
EQUIPMENT

PROFESSIONAL FLEET MANAGEMENT

SENtrack
TELECEMATIC SYSTEM

1. Reduce service costs

The dashboard is used to monitor the machine and its main operating parameters (temperatures, consumption). If key figures deviate significantly from the target value, the user is informed immediately.

2. Reduce consumption

You will receive daily updated insights into your fleet processes: Easily identify and optimize times when machines are idle or change set parameters when machines are underloaded to reduce consumption.

„What if you could receive real-time data from all your machines with just one click and so increase your productivity? SENNEBOGEN's SENtrack telematic system makes this possible. With the G series, you get the benefits of the monitoring tool as standard!”

3. Improve productivity

With just a few clicks, you can identify and optimize machine capacity, analyze routes if required and thus make your port processes more profitable.

4. Safeguard your investment

Practical alarm messages inform you about critical machine conditions. In the event of irregular movements, the machine can also easily be deactivated remotely.



MAINTENANCE AND SERVICE. KEEP IT SIMPLE. WITH MANAGEABLE TECHNOLOGY.



Reliable and practical technology makes life easier. We rely on hydraulics, electrics and electronics where they are most useful.



We make you happy, not reliant. With cost-effective components and fewer process steps, you can take care of the machine on your own.



The central electrical distributors and electronic modules facilitate maintenance, service and, if necessary, troubleshooting.



The SENNEBOGEN Troubleshooter is a guided troubleshooting tool for the fastest possible solution in the case of service.



All maintenance and service points are clearly arranged and easily accessible. The clear labeling of components makes finding your way around easy.

TECHNICAL DATA, EQUIPMENT

MACHINE TYPE

MODEL (TYPE)	826 G
--------------	-------

TANK CAPACITIES

FUEL	330 l
AD BLUE	30 l
HYDRAULIC TANK	240 l
COOLANT	approx. 40 l
ENGINE OIL	approx. 18 l
HYDRAULIC OIL	SENlube HYDRO D46
CENTRAL LUBRICATION SYSTEM	Automatic central lubrication for equipment and slewing ring, display of fault and empty messages via SENcon

ENGINE

TYPE	826 G DIESEL	826 G ELECTRIC	826 G BATTERY
	Stage V: Cummins B4.5 Rated power 127 kW/2200 rpm Operating point standard 127 kW/2200 rpm Operating point ECO 127 kW/2200 rpm Automatic idle/stop	Power 92 kW at 400 V/50 Hz Total connected load 110 kVA (125 kVA with magnetic system) Machine-side fuse protection 160 A (200 A with magnetic system)	Power 92 kW at 400 V/50 Hz Engine start-up via frequency converter without starting current peaks
COOLING	water-cooled, charge air cooling, coolant cooling		
DISPLACEMENT	4.5 l		
NUMBER OF CYLINDERS	4		
BATTERIES	2 x 110 Ah / 750 A, battery disconnect switch		
ELECTRICAL SYSTEM	24 V		
OPTIONS	Engine block heater		
	Electric fuel pump		
	Cyclone pre-separator for use with high dust loads		

UPPERCARRIAGE

DESIGN	Torsion-resistant box design, precision crafted, steel bushings for boom mounting, engine installed in the longitudinal direction
COOLING SYSTEM	Cooling system with 3 cooling circuits and demand-based fan control consisting of charge air cooling, coolant cooling and hydraulic oil cooling, hydraulically driven, thermostatically controlled, including fan reversal
OPTIONS	LED lighting package
	Swing bearing brake
	Fire extinguisher
	Low-temperature packages
	Hydraulic tank preheating
	15 kW magnetic generator
	Additional ballast 0.5 t
	Comprehensive uppercarriage railings
	Warning beacons and alarm horns
	Compressor for cleaning the machine

TECHNICAL DATA, EQUIPMENT

HYDRAULIC SYSTEM

Load sensing / LUDV hydraulic system, electro-hydraulically pre-controlled working functions	
OPERATING PRESSURE	up to 350 bar
LOAD LIMIT CONTROL	Optimized load limit control; in order to use the best possible operating point of the diesel engine at all times, even under full load
CONTROL SYSTEM	Proportional, precision electrical control of work movements, 2 electronic joysticks for work functions, additional functions via switches and foot pedals
SAFETY	Pipe-fracture safety valve for stick and compact boom as standard Emergency lowering of the equipment in case of engine standstill
OPTIONS	Bio-oil filling
	Tool Control for programming pressure/ rate of up to 10 tools
	Load torque warning with capacity display
	Overload safeguard with shutdown
	SENNEBOGEN HydroClean micro-filter system (3 µm) with water separator
	Supplementary hydraulic circuit for hydraulic packages
Hydraulic oil SENlube HYDRO POLAR for up to -30°C surrounding temperature	

SLEWING DRIVE

GEARBOX	Planetary gearbox with axial piston motor, integrated brake valves
PARKING BRAKE	Spring-loaded, hydraulically ventilated multi-disk safety brake
SLEWING RING	internal gearing, strong ball bearing ring, sealed
SLEWING SPEED	0-8 rpm
TORQUE	65 kNm



TECHNICAL DATA, EQUIPMENT

CAB*	 
CAB TYPE	Maxcab, 2.8 m elevation
CAB FEATURES	Sliding door incl. sliding window, vibrationdamped, tinted safety glass, safety glass side window, skylight, windscreen wiper, sunblind for front and roof windows, integrated microphone for hands-free system, air-suspended comfort seat, automatic climate control with fresh air and recirculated air filter, joystick steering (mobile version), SENcon control, emergency OFF
OPTIONS	Maxcab Industry, continuous bulletproof glass pane Protective roof guard, FOPS if applicable Protective front guard Active carbon filter for outside air Auxiliary heating system Air-conditioned comfort operator's seat Radio (DAB), with Bluetooth® function, hands-free system Multifunctional armrests Protective ventilation system Steering wheel control 30° tiltable cab Sun protection packages

MOBILE UNDERCARRIAGE	
MP26 mobile undercarriage with integrated 4-point outrigger, steering axle with automated pendulum axle, pendulum axle cylinder with pipe fracture safety valve, allwheel drive powered by an adjustable hydraulic motor with external, automatically actuated brake valve and 2-stage power shift transmission, planetary axles with integrated steering cylinders, 1-way accelerator pedal, service brake with 2-circuit system, multi-disc brake as parking brake	
TIRE TYPE	8 x 10.00-20
BRAKES	hydraulic
TRAVEL SPEED	0-20 km/h variable
OPTIONS	Up to 1 m pylon Stabilizer blade Support plate MP27 undercarriage

CRAWLER UNDERCARRIAGE	
R35/240 crawler undercarriage in stable, torsionally rigid box construction with hydraulic travel drive, hydraulically ventilated, spring-loaded multi-disc brake as parking brake	
TRAVEL SPEED	0-2.4 km/h
EQUIPMENT	600 mm triple grouser shoes
OPTIONS	Up to 1 m pylon 700 mm triple grouser shoes R35/340 undercarriage



TECHNICAL DATA, EQUIPMENT

EQUIPMENT	
RANGE	up to 13 m
CYLINDER	Hydraulic cylinder with high-quality sealing and guide elements, end position damping, sealed mounting points
OPTIONS	LED lighting Adjustable height and radius limitation Stick mounted camera Equipment type "ULM" with tipping kinematics Boom damping

OPERATING WEIGHT	
MASS	Mobile 27.3 t with MP26 and K11 incl. attachment Crawler 30 t with R35/240 and K11 incl. attachment
NOTE	Operating weight varies by model and equipment.




LOAD RATINGS K11 (MOBILE)

MP26

MAXCAB
2.80 m elevating (G280)

6.5 m boom
4.5 m grab stick

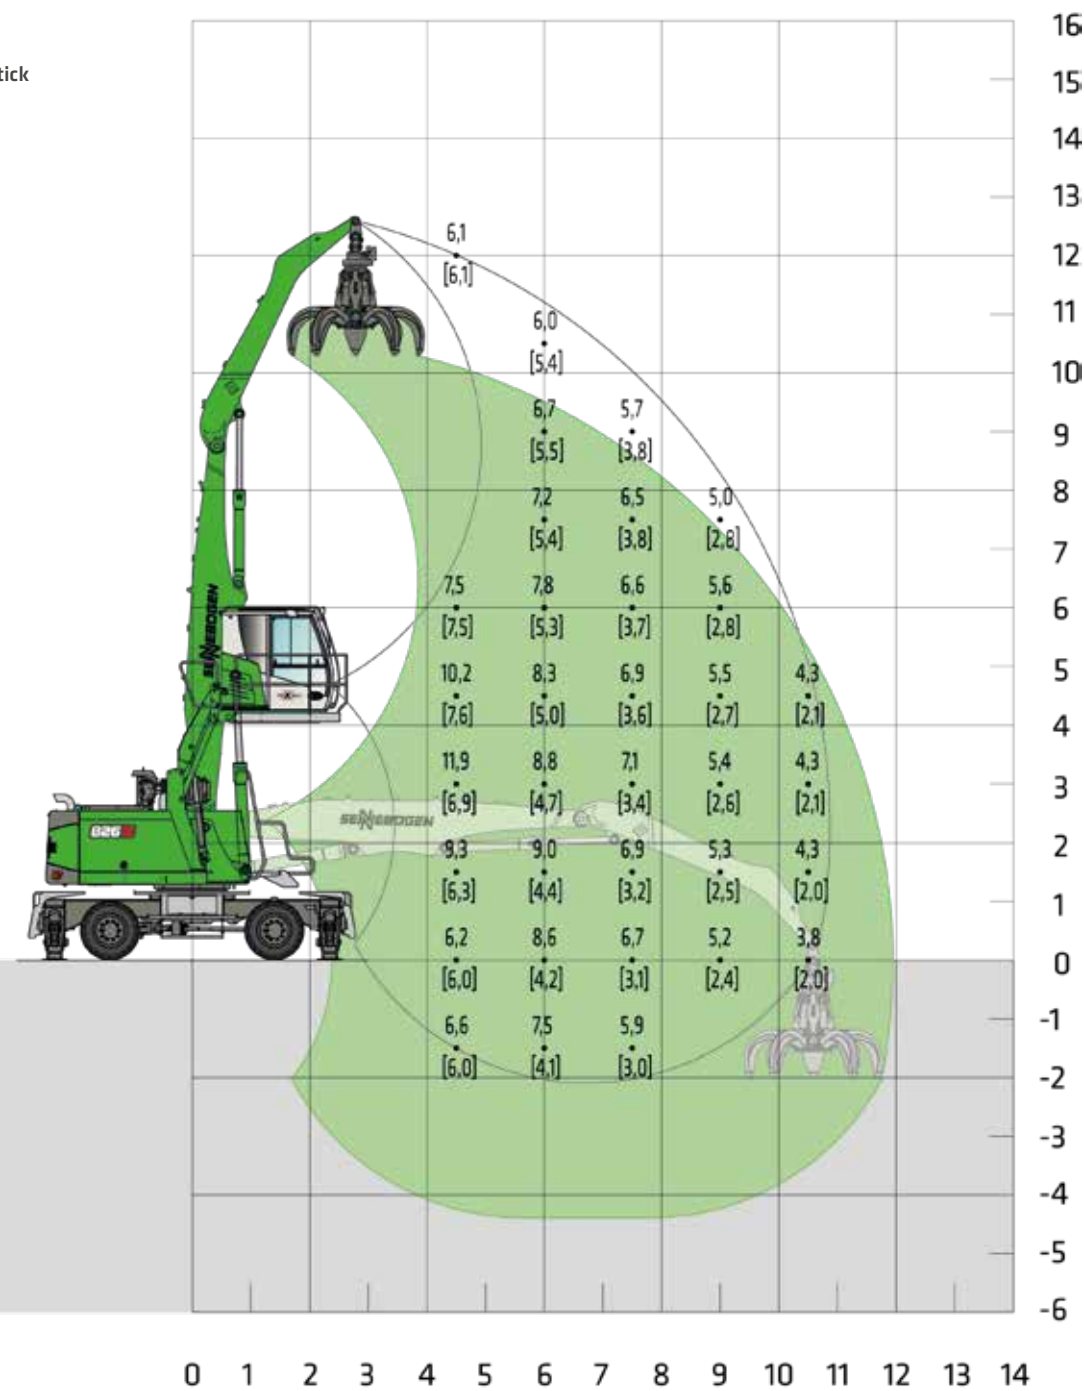


Notes:
All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. Load ratings apply to a machine with 4-point outrigger and for 360° slewing. The load ratings in brackets [] apply when the oscillating axle is blocked, unsupported, (free-standing) and for 360° slewing.

LOAD RATINGS K11 ULM (MOBILE)

MP26

MAXCAB
2.80 m elevating (G280)

6.5 m boom
4.3 m grab stick

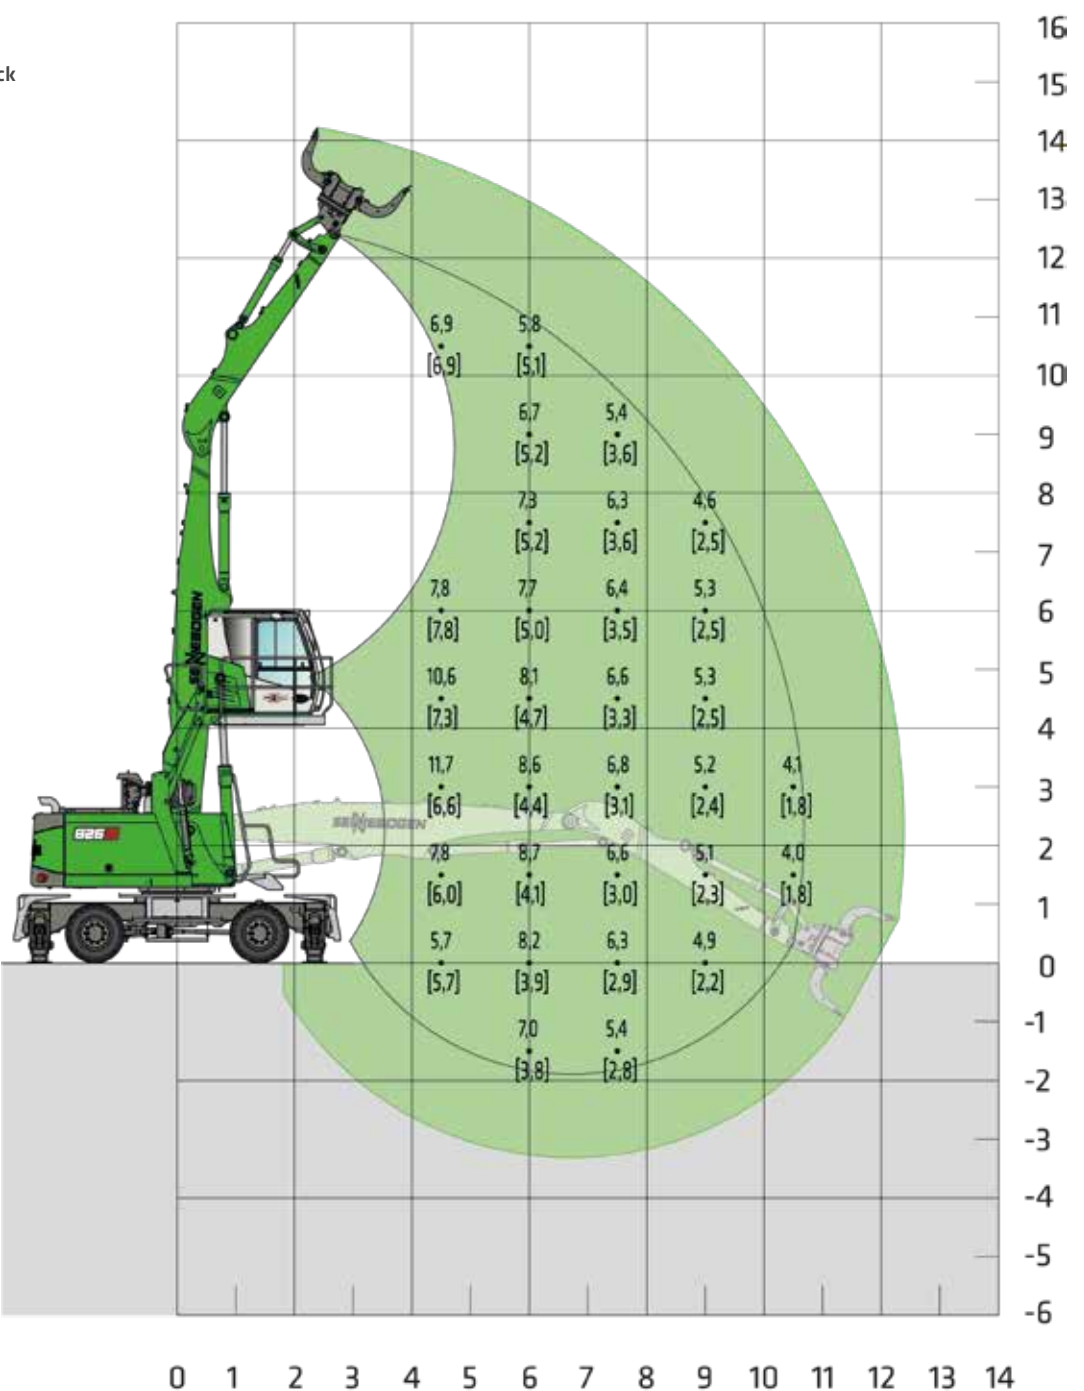


Notes:
All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. Load ratings apply to a machine with 4-point outrigger and for 360° slewing. The load ratings in brackets [] apply when the oscillating axle is blocked, unsupported, (free-standing) and for 360° slewing.

20240122103949
[20240122104100]

20240122104339
[20240122104359]

LOAD RATINGS K12 (MOBILE)




MP26



MAXCAB
2.80 m elevating (G280)




7.0 m boom
5.0 m grab stick

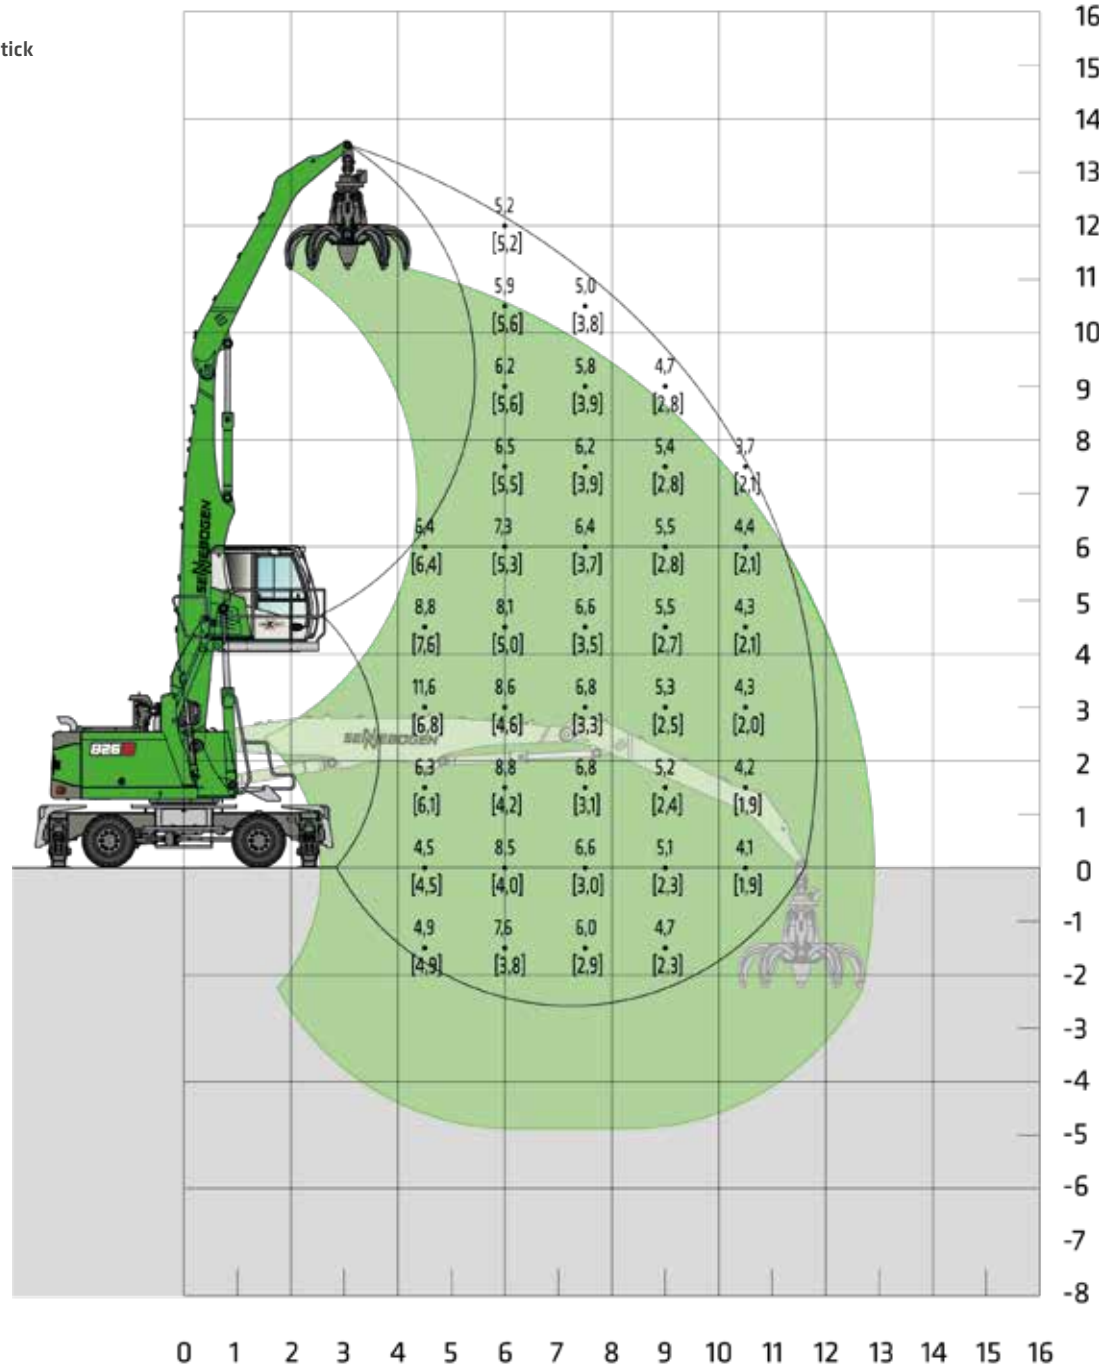

Notes:

All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. Load ratings apply to a machine with 4-point outrigger and for 360° slewing. The load ratings in brackets [] apply when the oscillating axle is blocked, unsupported, (free-standing) and for 360° slewing.


LOAD RATINGS K12 ULM (MOBILE)




MP27



MAXCAB
2.80 m elevating (G280)




7.5 m boom
4.3 m grab stick

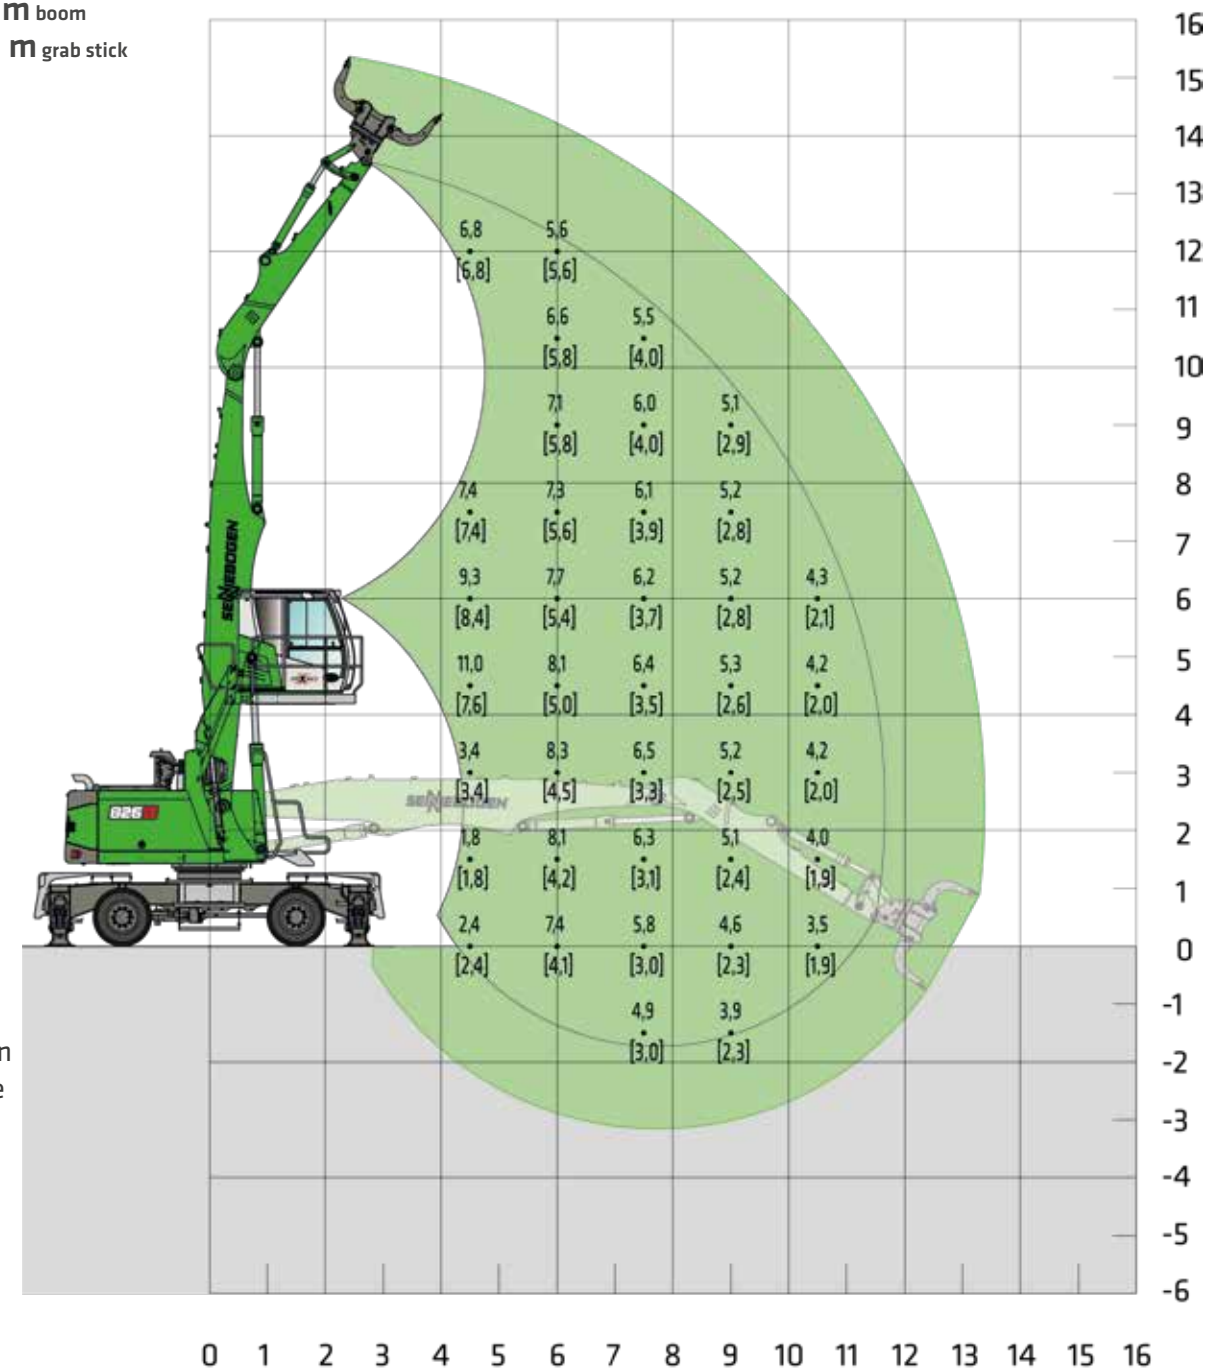

Notes:

All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. Load ratings apply to a machine with 4-point outrigger and for 360° slewing. The load ratings in brackets [] apply when the oscillating axle is blocked, unsupported, (free-standing) and for 360° slewing.

LOAD RATINGS K13 (MOBILE)




MP26



MAXCAB
2.80 m elevating (G280)



7.5 m boom
5.5 m grab stick

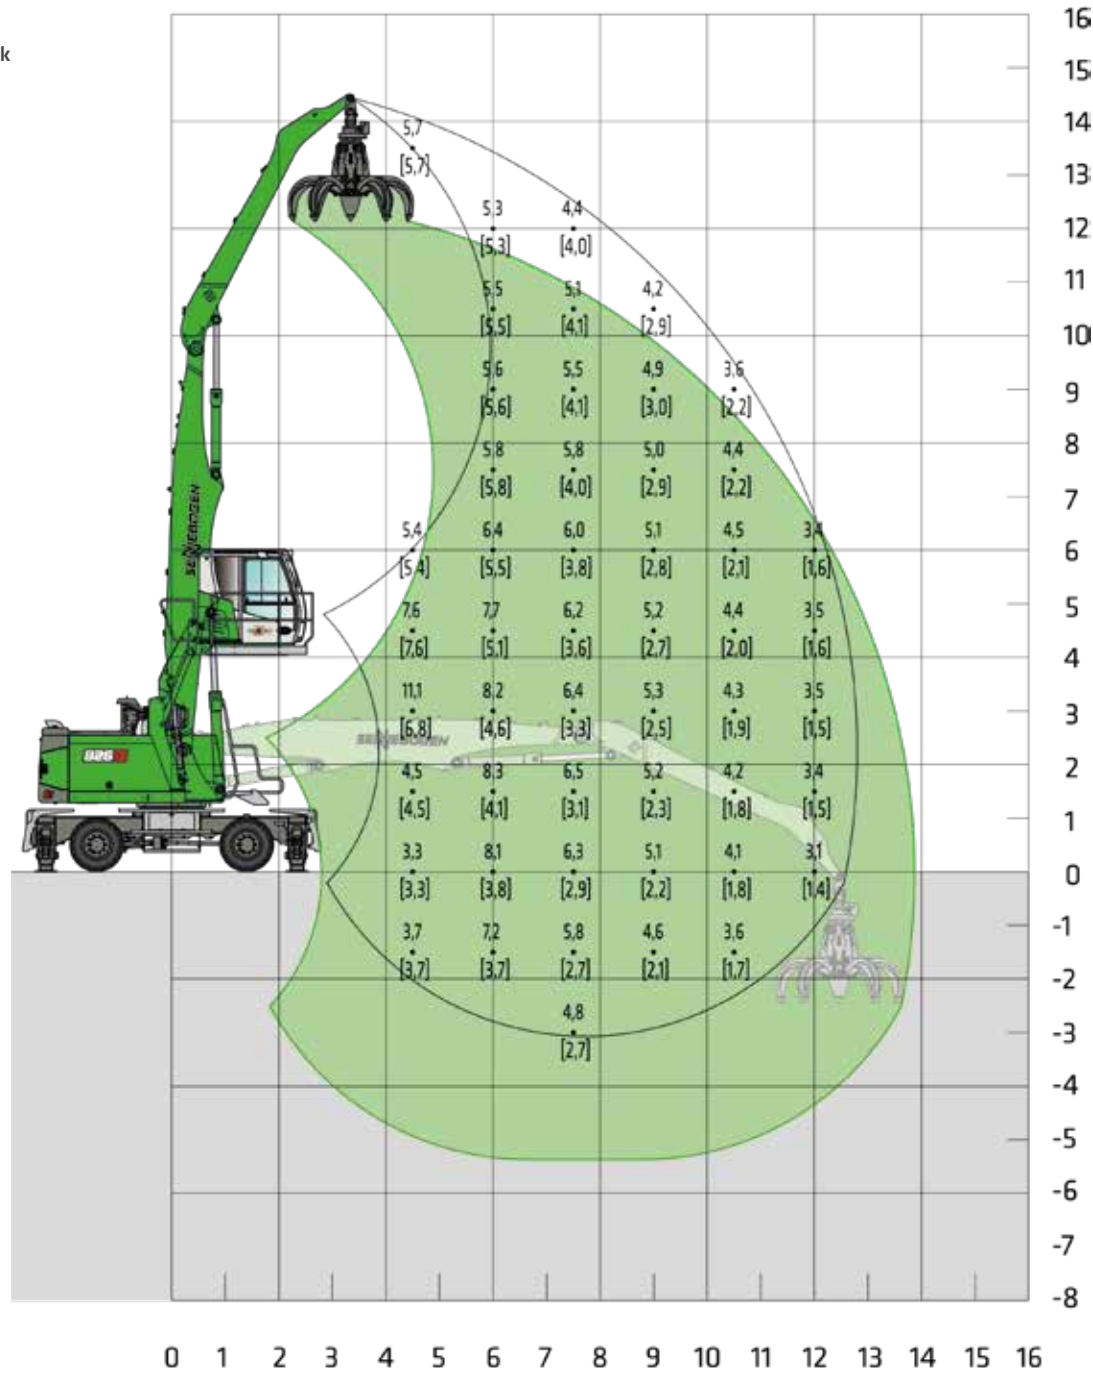


Machine shown
in mirror image

Notes:

All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. Load ratings apply to a machine with 4-point outrigger and for 360° slewing. The load ratings in brackets [] apply when the oscillating axle is blocked, unsupported, (free-standing) and for 360° slewing.


LOAD RATINGS K13 (MOBILE)




MP27



MAXCAB
2.80 m elevating (G280)



7.5 m boom
5.5 m grab stick

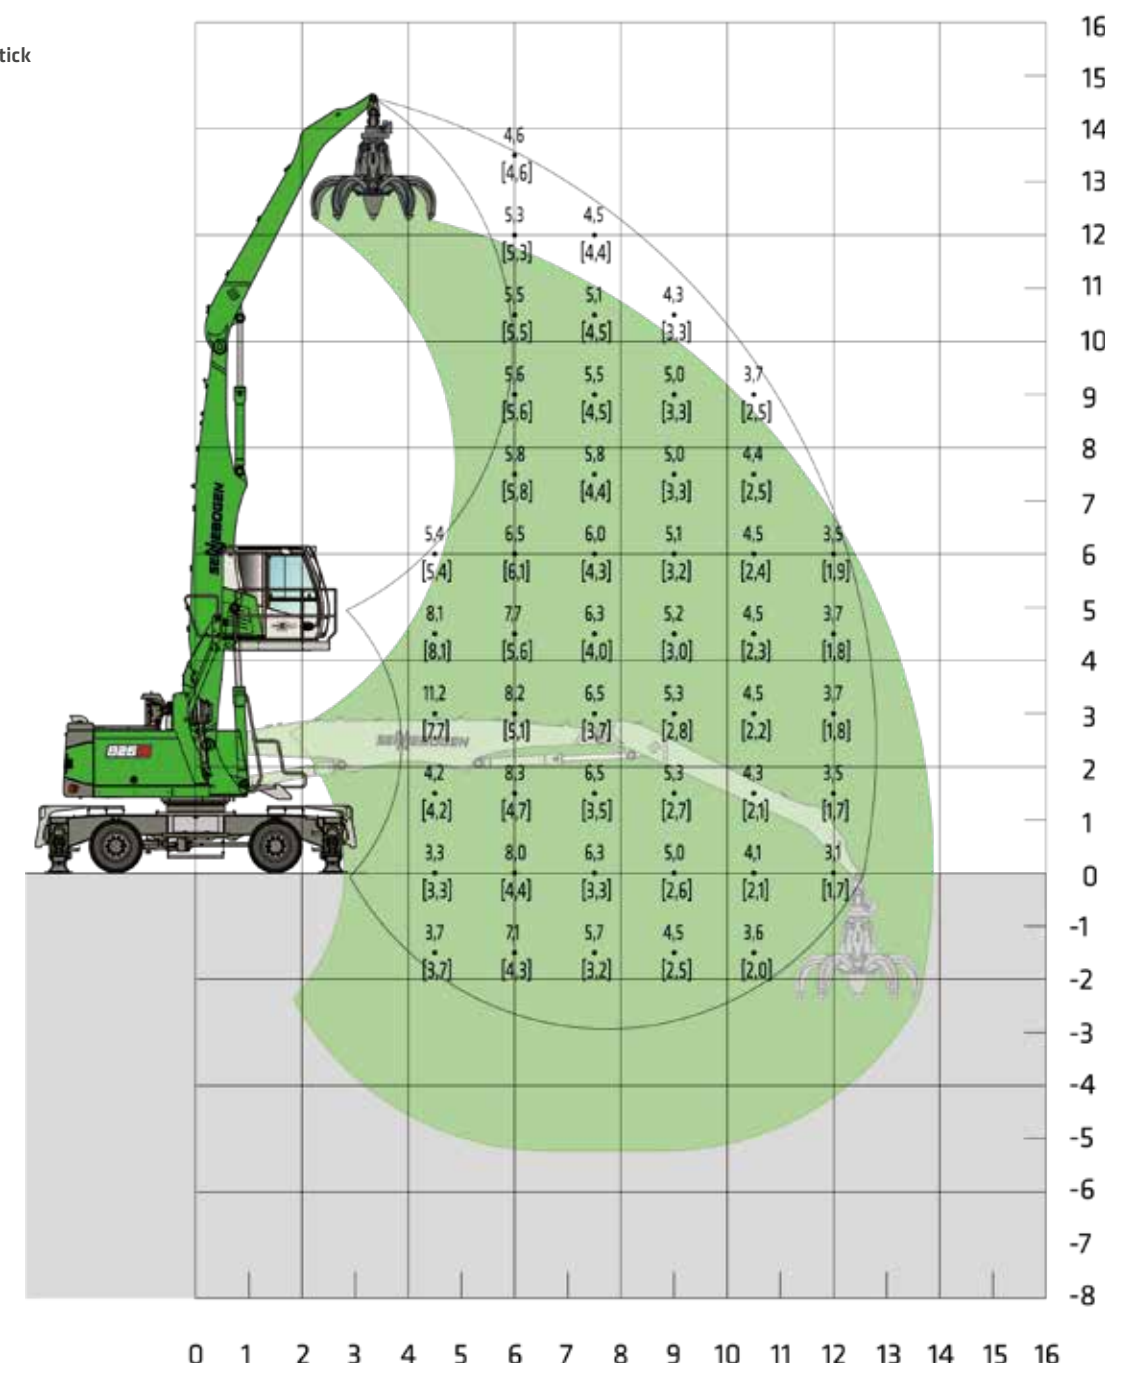


Machine shown
in mirror image

Notes:

All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. Load ratings apply to a machine with 4-point outrigger and for 360° slewing. The load ratings in brackets [] apply when the oscillating axle is blocked, unsupported, (free-standing) and for 360° slewing.

LOAD RATINGS K12 (CRAWLER)




R35/240



MAXCAB
2.80 m elevating (G280)



7.0 m boom
5.0 m grab stick

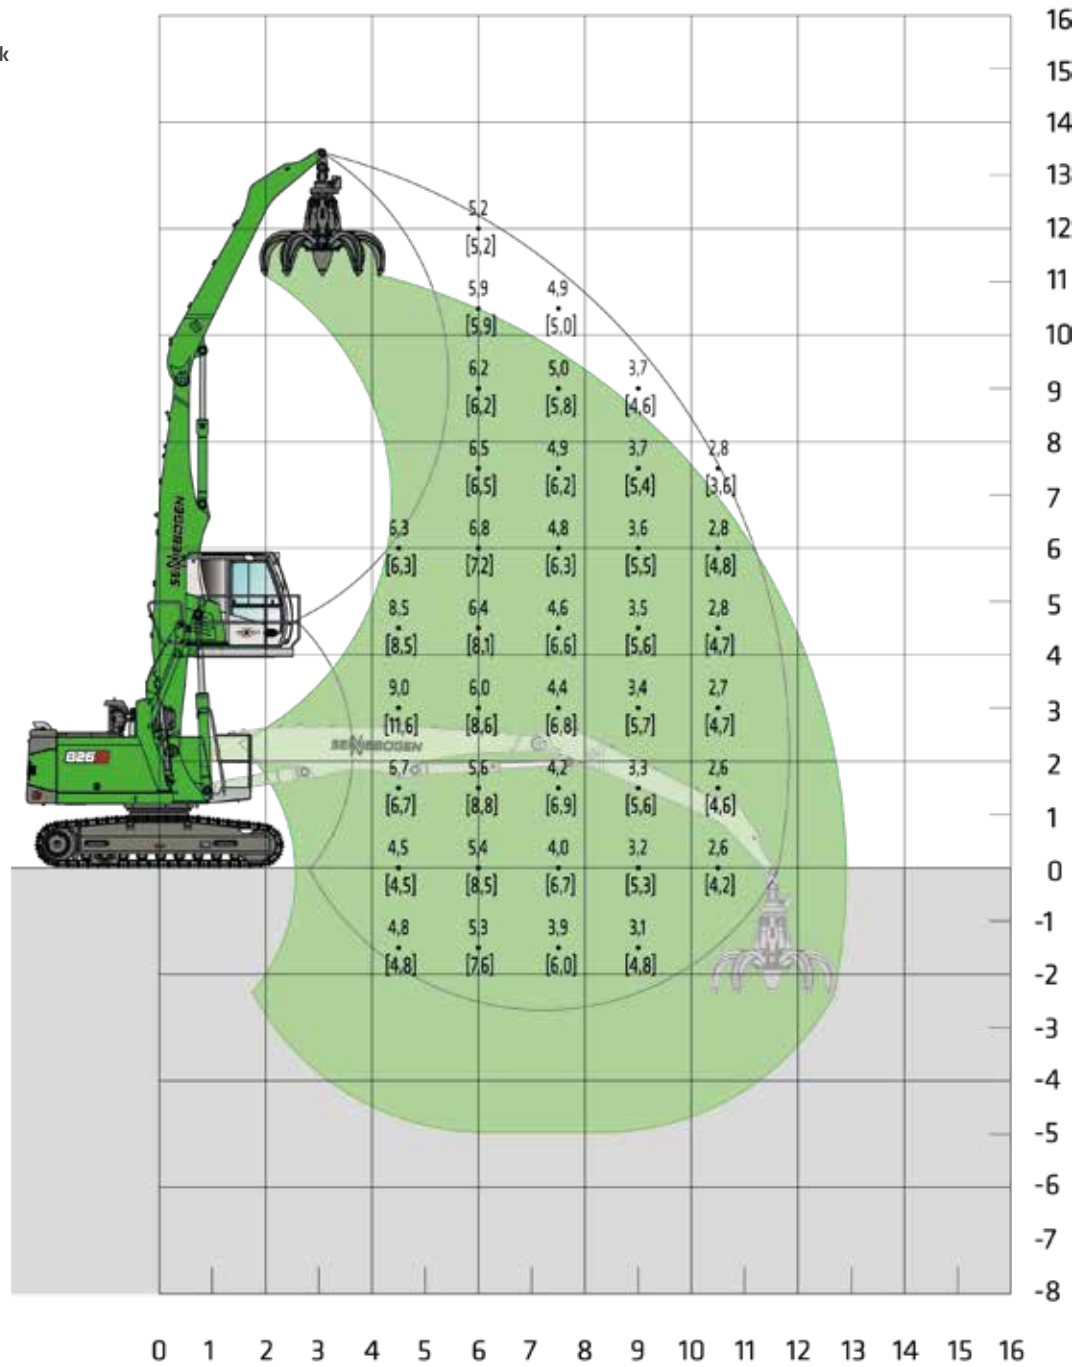


Machine shown
in mirror image

20240123145255

Notes:

All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook, etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. The specified load ratings apply to maximum track width and 360° slewing.

LOAD RATINGS K11 ULM (CRAWLER)




R35/240



MAXCAB
2.80 m elevating (G280)



6.5 m boom
4.3 m grab stick

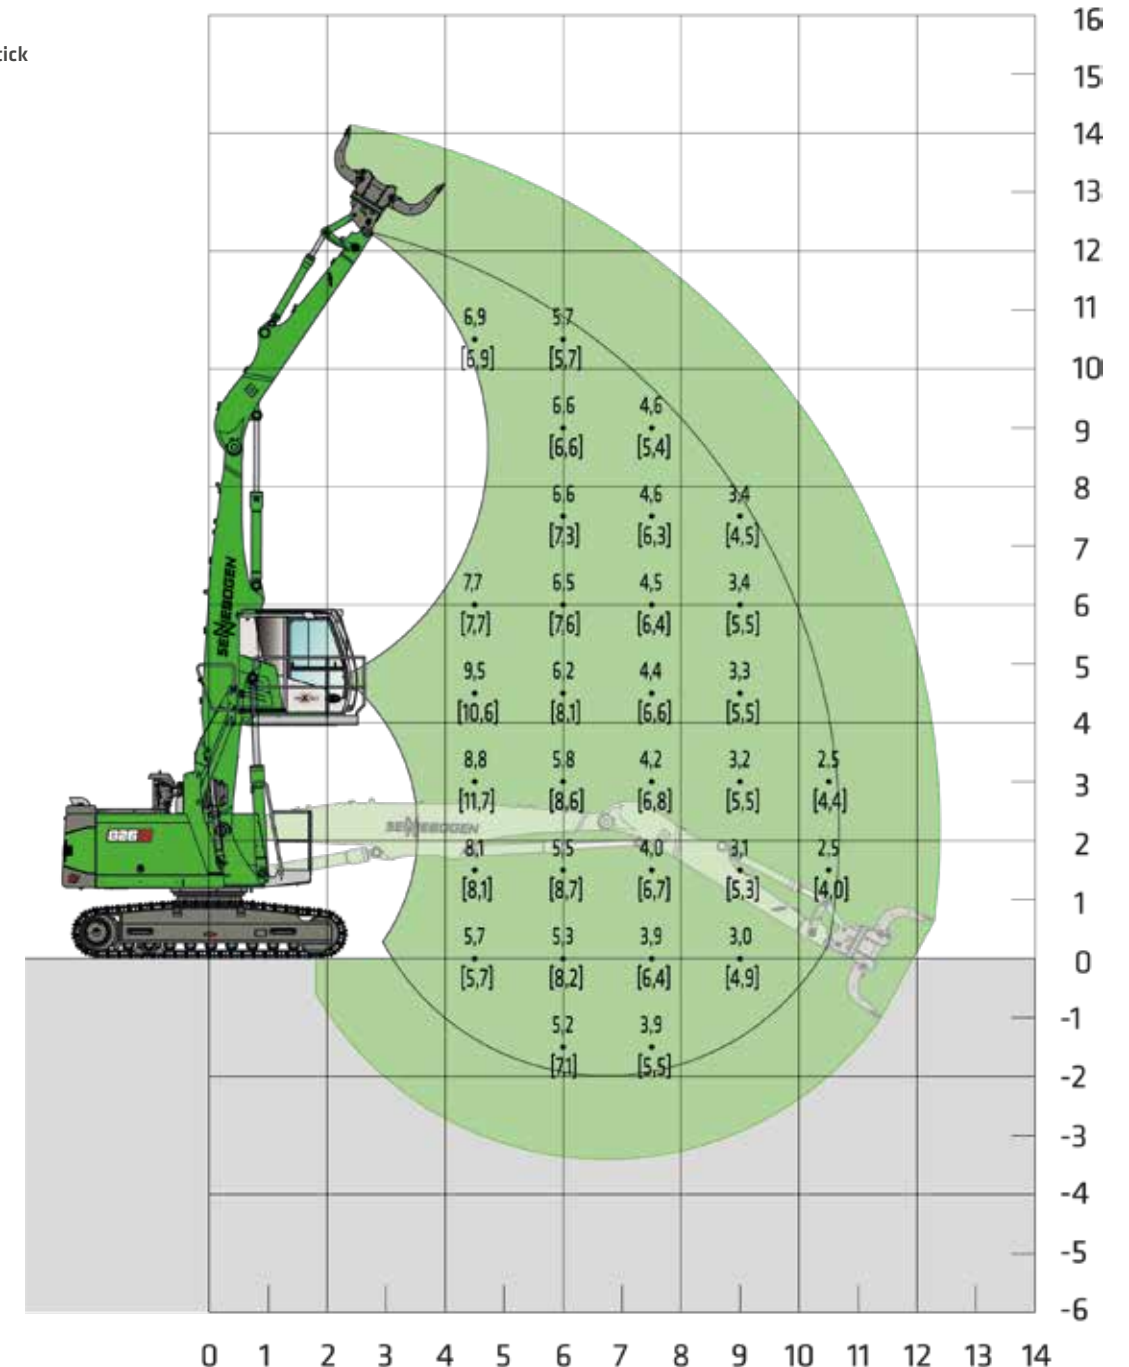

Machine shown
in mirror image

20240123145201

Notes:


All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook, etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. The specified load ratings apply to maximum track width and 360° slewing.


LOAD RATINGS K13 (CRAWLER)

 R35/340

 MAXCAB
2.80 m elevating (G280)

 7.5 m boom

 5.5 m grab arm

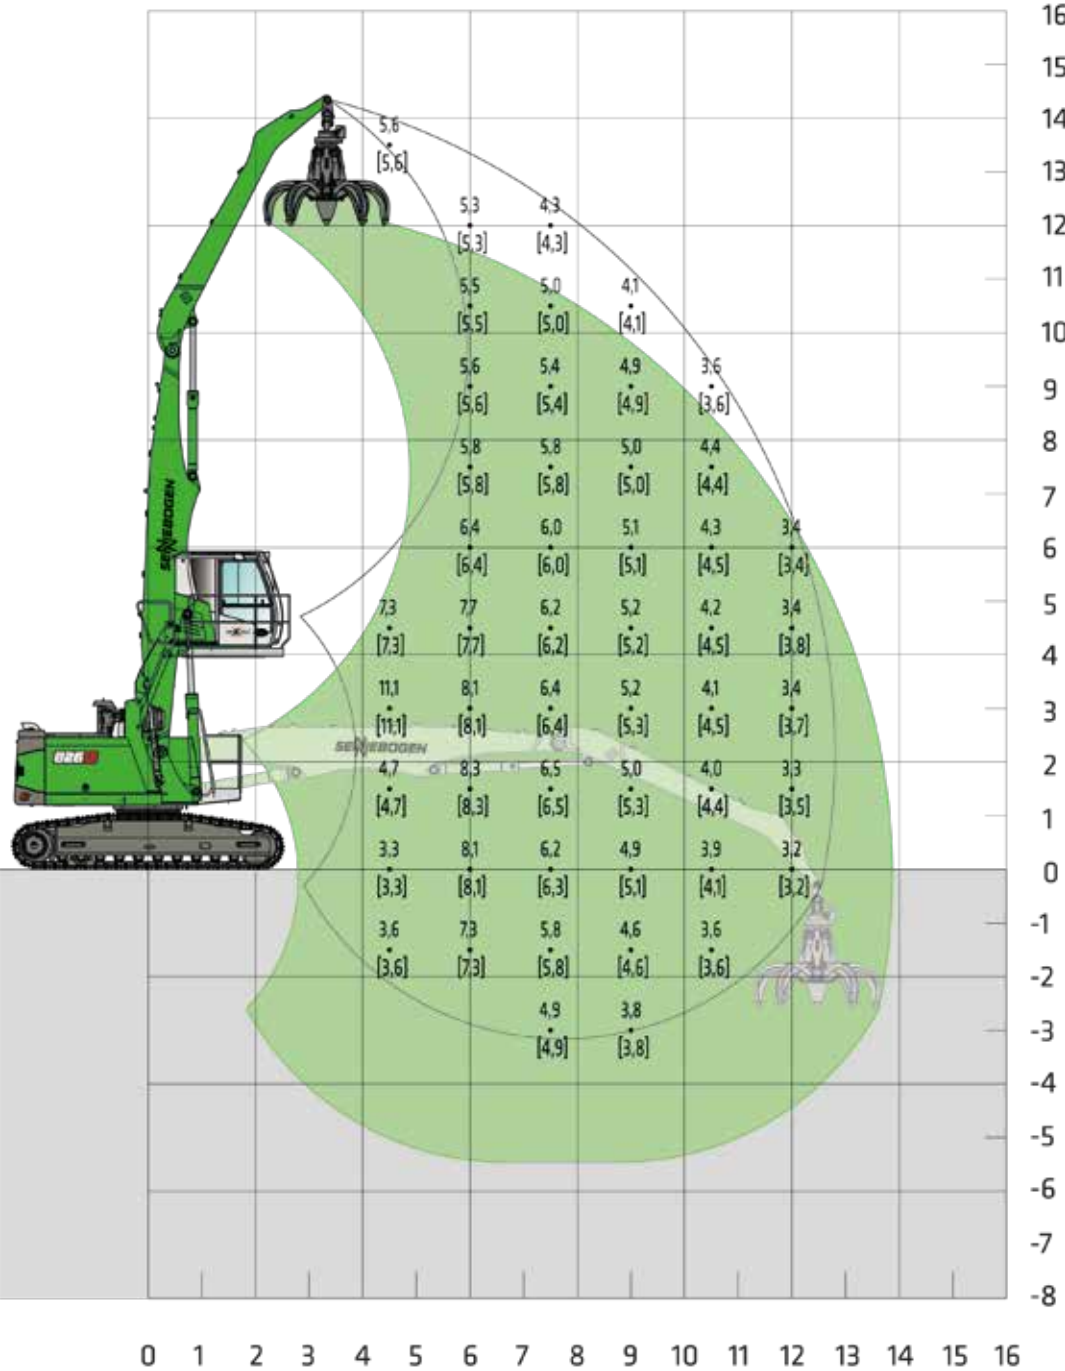

Machine shown
in mirror image

Notes:
All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook, etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. The specified load ratings apply to maximum track width and 360° slewing.


LOAD RATINGS K12 ULM (CRAWLER)

 R35/340

 MAXCAB
2.80 m elevating (G280)

 7.5 m boom


 4.3 m grapple arm

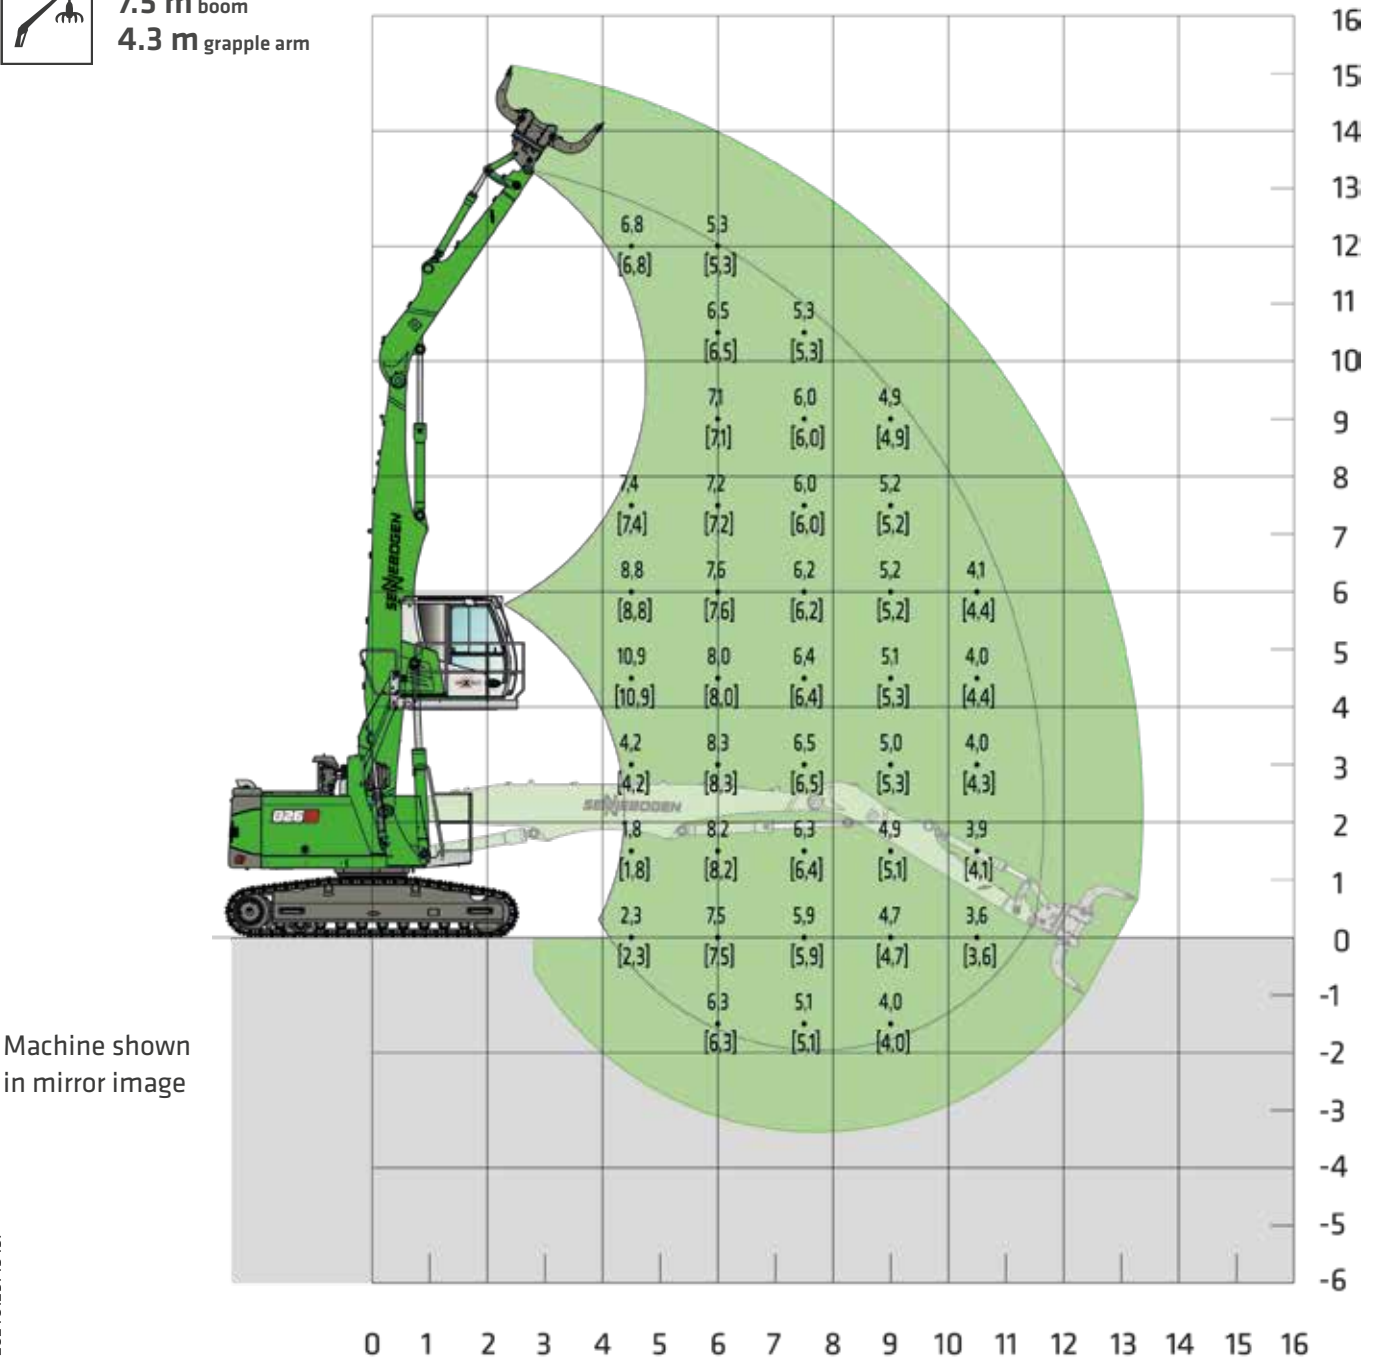

Machine shown
in mirror image


Notes:
All load ratings are given in tons (t) brought to bear at the end of the stick, without tools on firm level ground. Working tools such as grab, magnet, load hook, etc. are included in the specified load ratings. The stated values are 75 % of the static tipping load or 87 % of the hydraulic lifting force according to ISO10567. According to EU standard EN 474/5, hydraulic material handlers used for hoisting must be equipped with a pipe rupture safety device on lifting and stick cylinders and an overload warning device. The specified load ratings apply to maximum track width and 360° slewing.

DIMENSIONS MOBILE

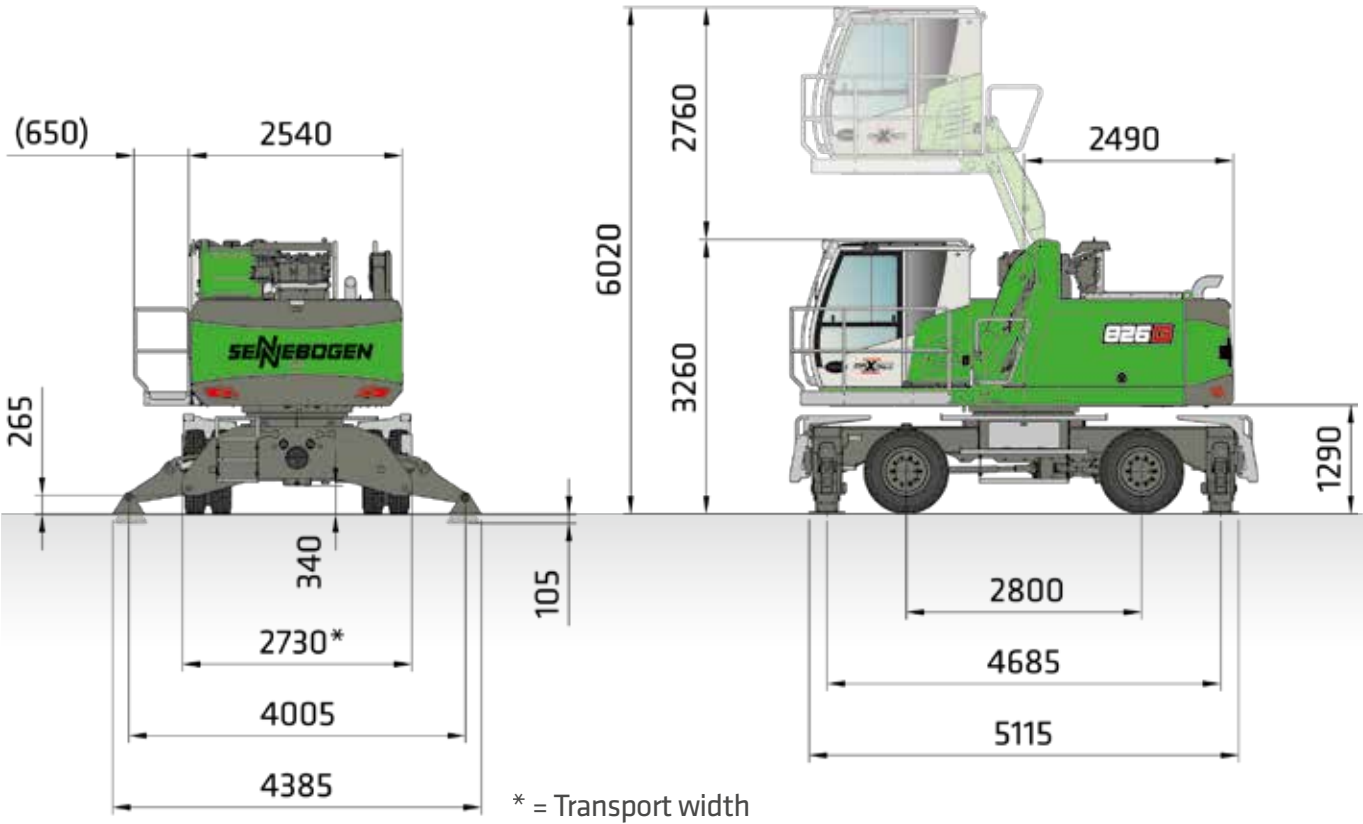

826 G WITH MP26 MOBILE UNDERCARRIAGE AAND G280 HYDRAULICALLY ELEVATING CAB (SERIES), SOLID RUBBER TIRES 10.00-20 (8X)

VERTICAL CLEARANCE WITH 600 L ORANGE PEEL GRAB VERTICAL CLEARANCE WITH 450 L SORTING GRAB

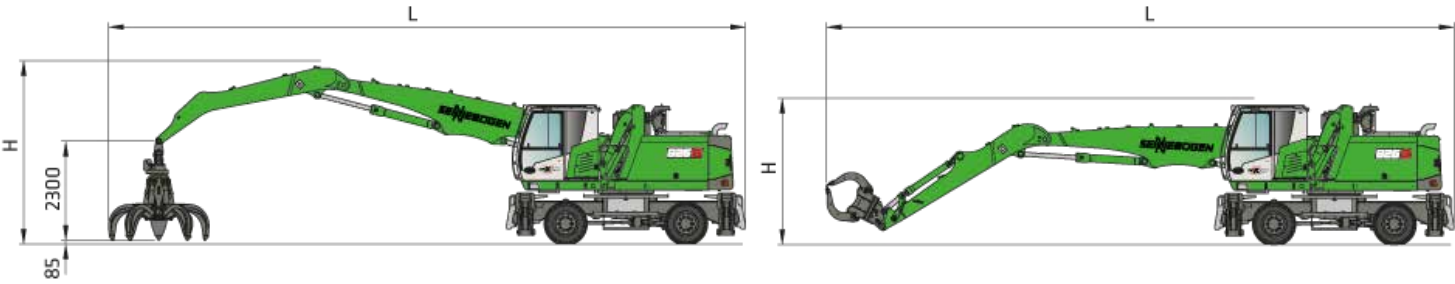


	COMPACT BOOM	GRAB STICK	PASSAGE LENGTH (L)	VERTICAL CLEARANCE (H) ORANGE PEEL GRAB	VERTICAL CLEARANCE (H) SORTING GRAB
K11	6.5 m	4.5 m	14.9 m	4.4 m	-
K11 ULM	6.5 m	4.3 m ULM	14.9 m	-	3.45 m
K12	7.0 m	5.0 m	15.9 m	4.5 m	-
K12 ULM	7.5 m	4.3 m ULM	15.7 m	-	3.45 m
K13	7.5 m	5.5 m	16.8 m	4.7 m	-

further transport dimensions available on request


Dimensions in [mm] Subject to technical changes.

DIMENSIONS MOBILE

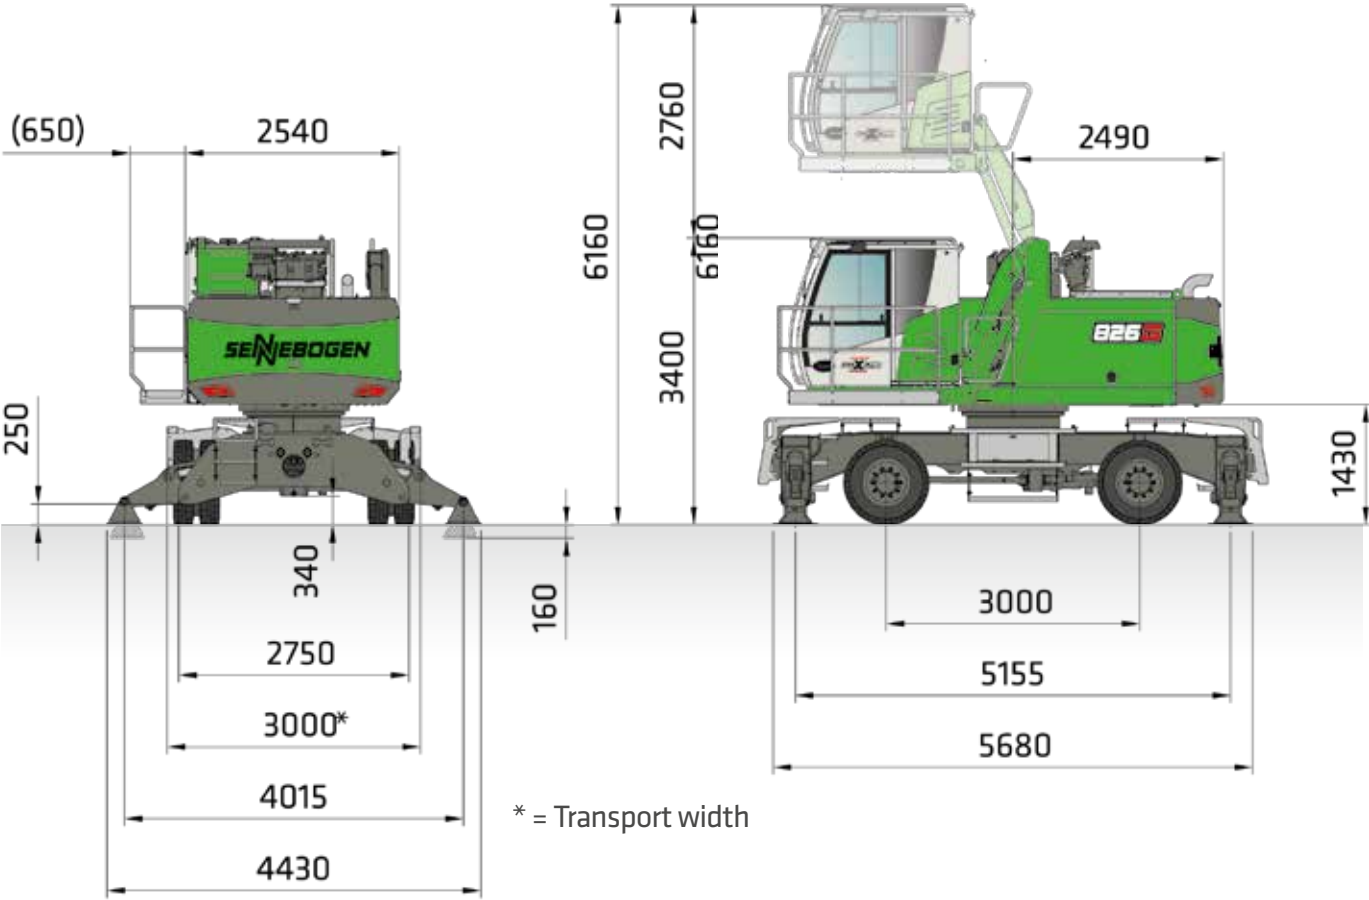

826 G WITH MP27 MOBILE UNDERCARRIAGE AND G280 HYDRAULICALLY ELEVATING CAB (SERIES), SOLID RUBBER TIRES 10.00-20 (8X)

VERTICAL CLEARANCE WITH 600 L ORANGE PEEL GRAB VERTICAL CLEARANCE WITH 450 L SORTING GRAB

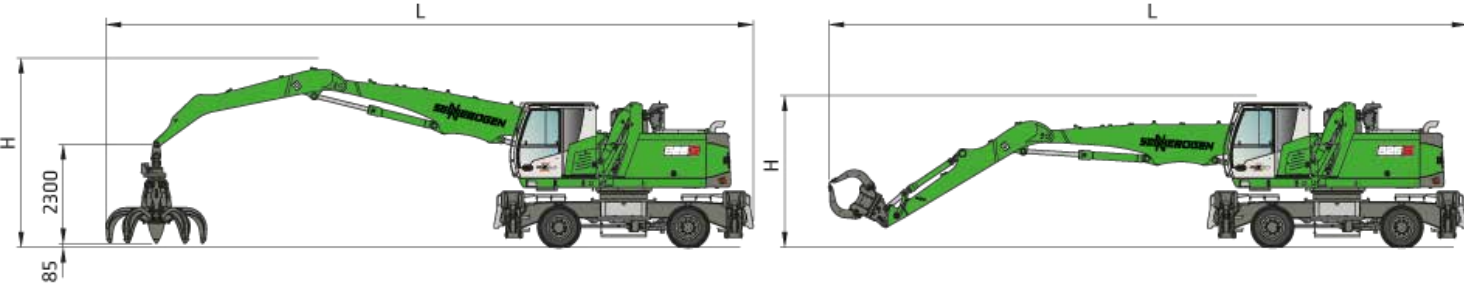


	COMPACT BOOM	GRAB STICK	PASSAGE LENGTH (L)	VERTICAL CLEARANCE (H) ORANGE PEEL GRAB	VERTICAL CLEARANCE (H) SORTING GRAB
K11	6.5 m	4.5 m	15.1 m	4.5 m	-
K11 ULM	6.5 m	4.3 m ULM	15.0 m	-	3.5 m
K12	7.0 m	5.0 m	16.0 m	4.6 m	-
K12 ULM	7.5 m	4.3 m ULM	16.0 m	-	3.5 m
K13	7.5 m	5.5 m	17.0 m	4.7 m	-

further transport dimensions available on request


Subject to technical changes. Dimensions in [mm]

DIMENSIONS CRAWLER

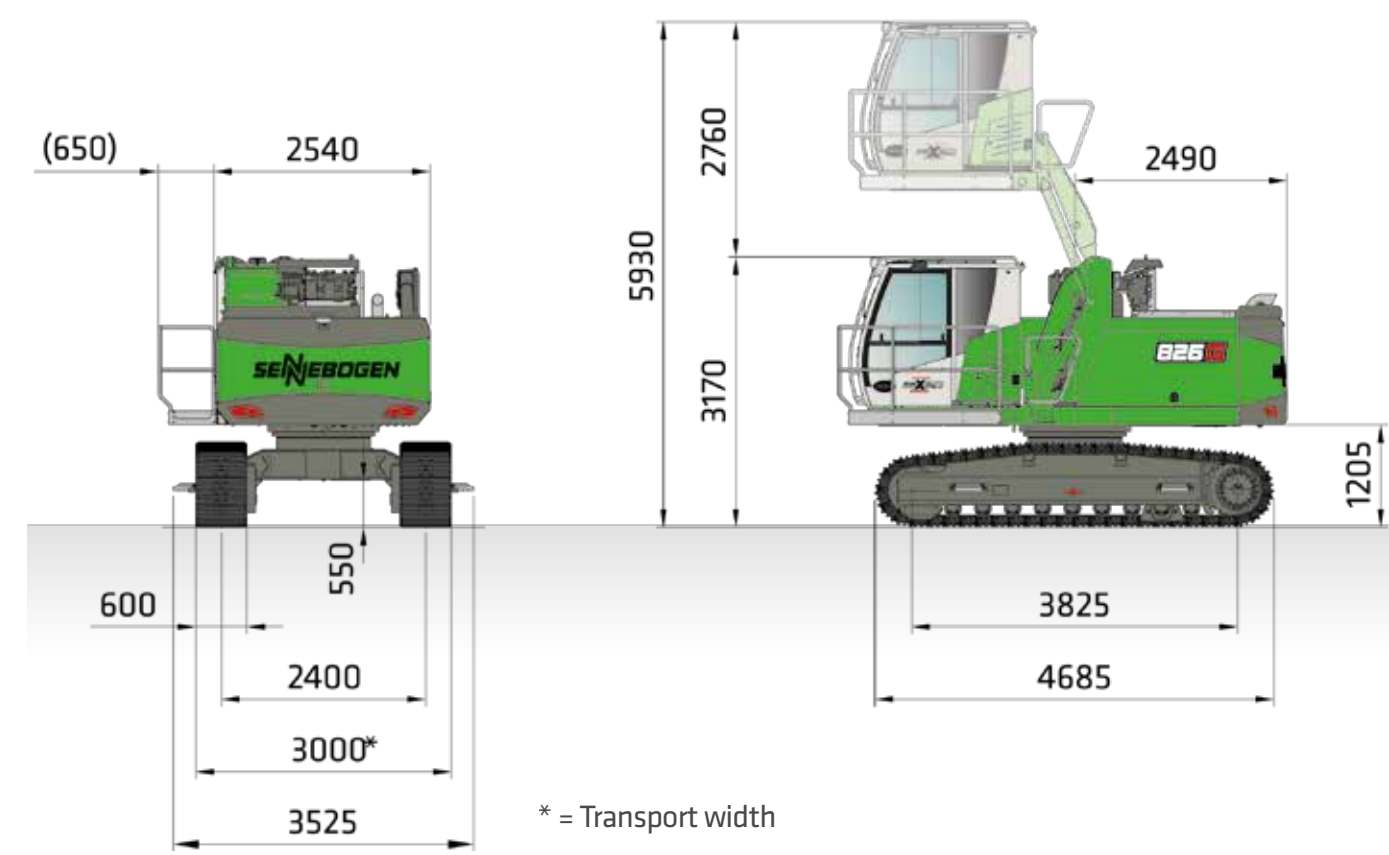

826 G WITH R35/240 CRAWLER UNDERCARRIAGE AND G280 HYDRAULICALLY ELEVATING CAB (SERIES)

VERTICAL CLEARANCE WITH 600 L ORANGE PEEL GRAB VERTICAL CLEARANCE WITH 450 L SORTING GRAB

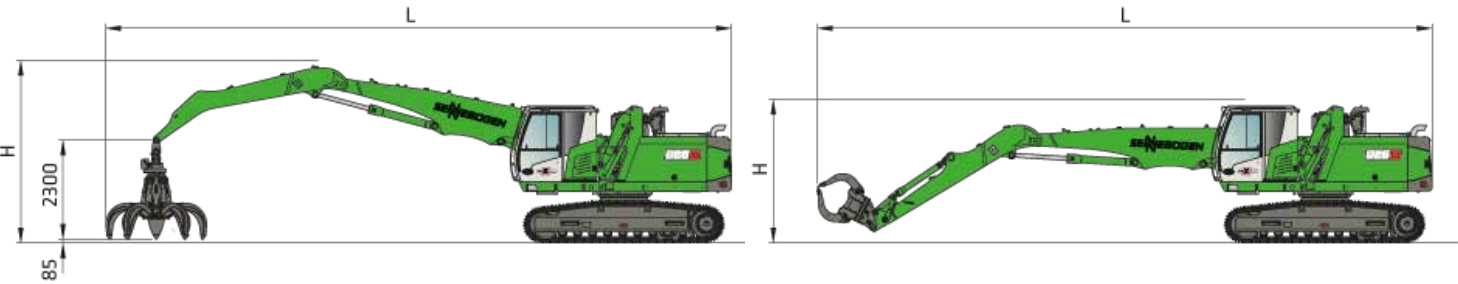


	COMPACT BOOM	GRAB STICK	PASSAGE LENGTH (L)	VERTICAL CLEARANCE (H) ORANGE PEEL GRAB	VERTICAL CLEARANCE (H) SORTING GRAB
K11	6.5 m	4.5 m	14.6 m	4.4 m	-
K11 ULM	6.5 m	4.3 m ULM	14.5 m	-	3.35 m
K12	7.0 m	5.0 m	15.5 m	4.5 m	-
K12 ULM	7.5 m	4.3 m ULM	15.5 m	-	3.35 m
K13	7.5 m	5.5 m	16.5 m	4.6 m	-

further transport dimensions available on request


Dimensions in [mm] Subject to technical changes.

DIMENSIONS CRAWLER

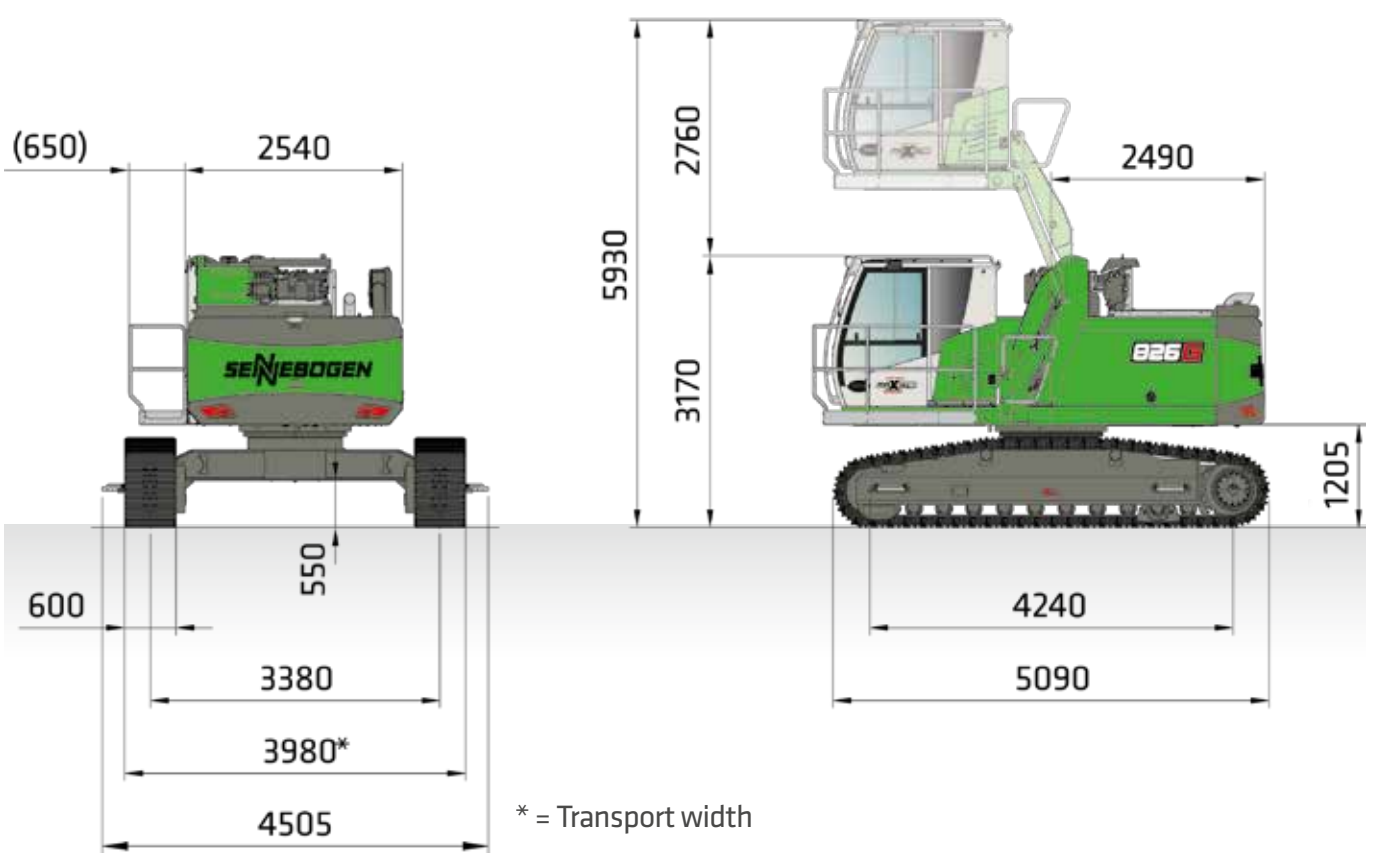

826 G WITH R35/340 CRAWLER UNDERCARRIAGE AND G280 HYDRAULICALLY ELEVATING CAB (SERIES)

VERTICAL CLEARANCE WITH 600 L ORANGE PEEL GRAB VERTICAL CLEARANCE WITH 450 L SORTING GRAB

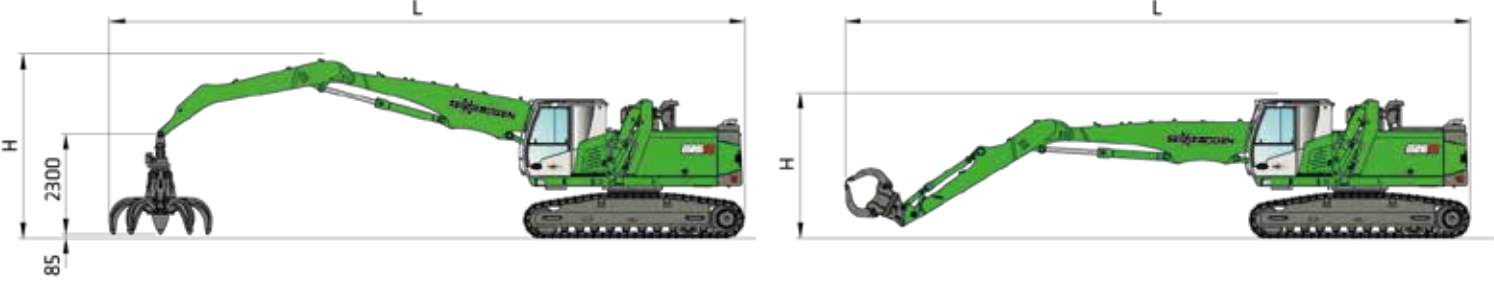


	COMPACT BOOM	GRAB STICK	PASSAGE LENGTH (L)	VERTICAL CLEARANCE (H) ORANGE PEEL GRAB	VERTICAL CLEARANCE (H) SORTING GRAB
K11	6.5 m	4.5 m	14.6 m	4.4 m	-
K11 ULM	6.5 m	4.3 m ULM	14.4 m	-	3.35 m
K12	7.0 m	5.0 m	15.6 m	4.5 m	-
K12 ULM	7.5 m	4.3 m ULM	15.4 m	-	3.35 m
K13	7.5 m	5.5 m	16.6 m	4.6 m	-


further transport dimensions available on request

Subject to technical changes. Dimensions in [mm]

TRANSPORT DIMENSIONS MOBILE

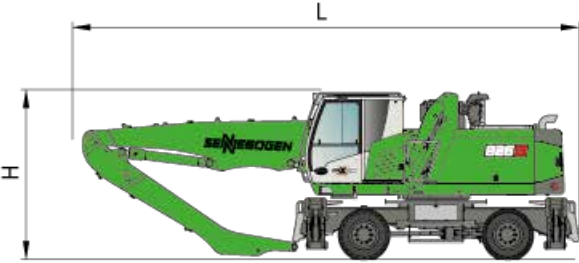


826G TRANSPORT DIMENSIONS MP26				
	COMPACT BOOM	GRAB STICK	TRANSPORT LENGTH (L)	TRANSPORT HEIGHT (H)
K9	6.5 m	4.5 m	10.0 m	3.3 m
K11 ULM	6.5 m	4.3 m ULM	10.0 m	3.3 m
K12	7.0 m	5.0 m	10.5 m	3.3 m
K12 ULM	7.5 m	4.3 m ULM	11.0 m	3.3 m
K13	7.5 m	5.5 m	11.0 m	3.7 m

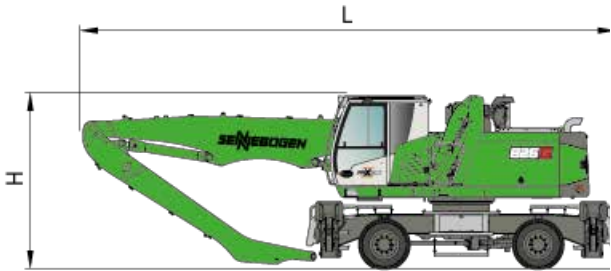


826G TRANSPORT DIMENSIONS MP27				
	COMPACT BOOM	GRAB STICK	TRANSPORT LENGTH (L)	TRANSPORT HEIGHT (H)
K11	6.5 m	4.5 m	10.2 m	3.45 m
K11 ULM	6.5 m	4.3 m ULM	10.2 m	3.45 m
K12	7.0 m	5.0 m	10.7 m	3.45 m
K12 ULM	7.5 m	4.3 m ULM	11.2 m	3.45 m
K13	7.5 m	5.5 m	11.2 m	3.50 m

TRANSPORT DIMENSIONS CRAWLER

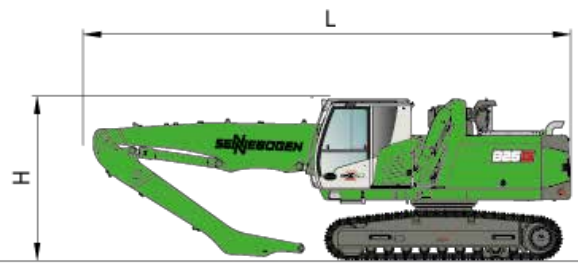

826G TRANSPORT DIMENSIONS R35/240				
	COMPACT BOOM	GRAB STICK	TRANSPORT LENGTH (L)	TRANSPORT HEIGHT (H)
K11	6.5 m	4.5 m	9.7 m	3.3 m
K11 ULM	6.5 m	4.3 m ULM	9.7 m	3.3 m
K12	7.0 m	5.0 m	10.2 m	3.3 m
K12 ULM	7.5 m	4.3 m ULM	10.7 m	3.3 m
K13	7.5 m	5.5 m	10.7 m	3.8 m

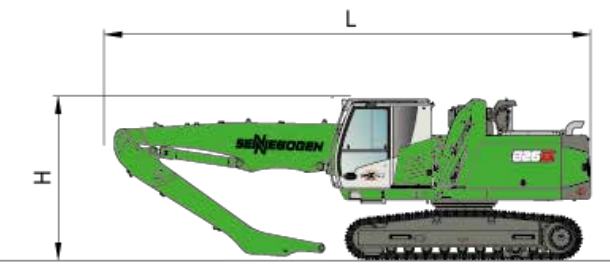

826G TRANSPORT DIMENSIONS R35/340				
	COMPACT BOOM	GRAB STICK	TRANSPORT LENGTH (L)	TRANSPORT HEIGHT (H)
K11	6.5 m	4.5 m	9.8 m	3.3 m
K11 ULM	6.5 m	4.3 m ULM	9.8 m	3.3 m
K12	7.0 m	5.0 m	10.3 m	3.3 m
K12 ULM	7.5 m	4.3 m ULM	10.8 m	3.3 m
K13	7.5 m	5.5 m	10.8 m	3.8 m



SENNEBOGEN ACADEMY

Increase your knowledge because success is based on knowledge. In the SENNEBOGEN Academy we place great importance on ensuring it flows powerfully.

➔ www.sennebogen-academy.com



SERVICE AND MAINTENANCE

Comprehensive customer service. And supply of spare parts. Service is a TOP priority for us.

➔ www.sennebogen.com/customer-service



SENtrack

Efficient fleet management with SENtrack: Use information that would otherwise stay hidden and increase your efficiency.

➔ www.sennebogen.com/sentrack



RENTAL & USED

Discover the unique range of rental machines available from SENNEBOGEN Rental & Used. Find your rental machine here:

➔ www.sennebogen-rental-used.com

JOIN OUR OPERATORS' CLUB

The spotlight is on you and your machine! We focus on exclusive information, sharing experiences with other SENNEBOGEN operators as well as fun and enthusiasm.

All benefits here ➔ www.sennebogen.com/operators-club



MOVE BIG THINGS WITH US



over **74**
years of
experience

100%
family company

over **2200**
experienced
specialists worldwide

5
production plants
in Germany

over **180**
sales and service partners
worldwide

27
different material
handlers



Telehandler
4-6 t

Balancer
130-300 t

Material handler
17-460 t

Duty cycle crane
30-300 t


Crawler crane
50-300 t

Telescopic crane
16-200 t

Port crane
300 t

This catalog describes machine models, the scope of equipment of individual models, and configuration options (standard equipment and optional equipment) of the machines delivered by SENNEBOGEN Maschinenfabrik GmbH. Machine illustrations may contain optional and supplementary equipment. Actual equipment may vary depending on the country to which the machines are delivered, especially in regard to standard and optional equipment. All product designations used may be trademarks of SENNEBOGEN Maschinenfabrik GmbH or other supplying companies, and any use by third parties for their own purposes may violate the rights of the owners.

Please contact your local SENNEBOGEN sales partner for information concerning the equipment variants offered. Requested performance characteristics are only binding if they are expressly stipulated upon conclusion of the contract. Delivery options and technical features are subject to change. All information is supplied without liability. Equipment is subject to change, and rights of advancement are reserved. © SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany. Reproduction in whole or in part only with written consent of SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany.

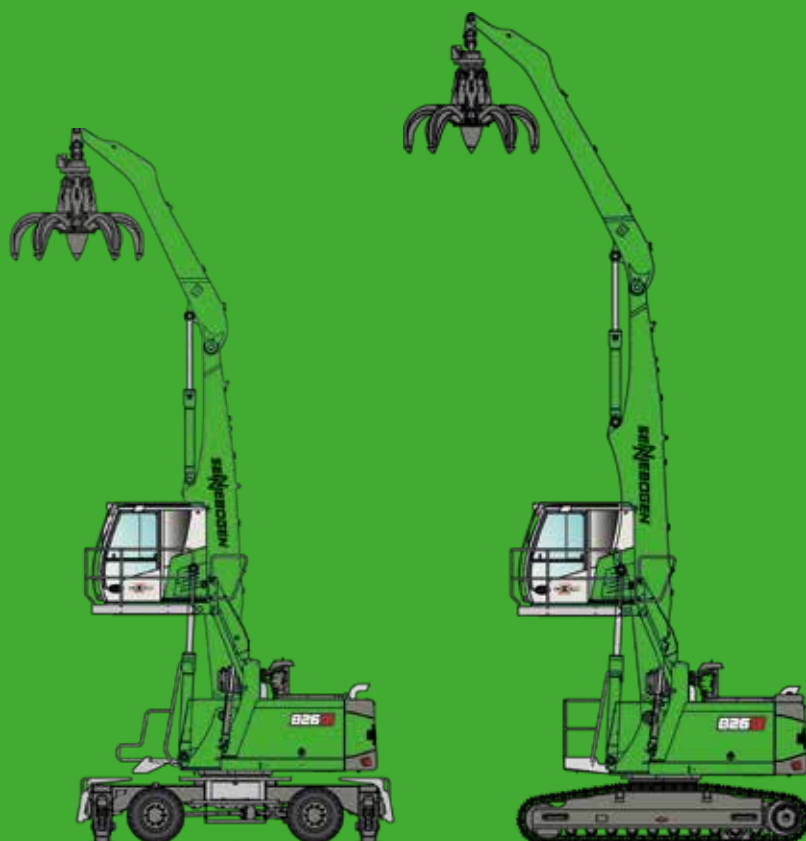

SENNEBOGEN
Maschinenfabrik GmbH
Hebbelstrasse 30
94315 Straubing, Germany

➔ www.sennebogen.com

MOVE BIG THINGS

Green Line Sales

☎ +49 (0) 9421 / 540 - 146

✉ materialhandling@sennebogen.de

SPARE PARTS CENTER

Spare parts orders

✉ spareparts@sennebogen.de

AFTER SALES

Technical support

✉ service@sennebogen.de